


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-12500

保守率	良	0.73
	中	0.69
	否	0.65


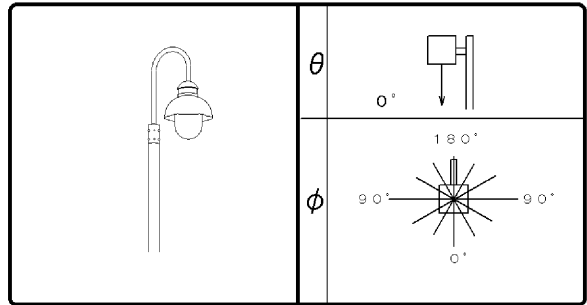


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\frac{1}{2}$	5.8 %
	F $\frac{1}{4}$	45.2 %
	F \bigcirc	51.0 %
	器具光束	2144 lm

備考

前面	グローブ (乳白)
反射面	

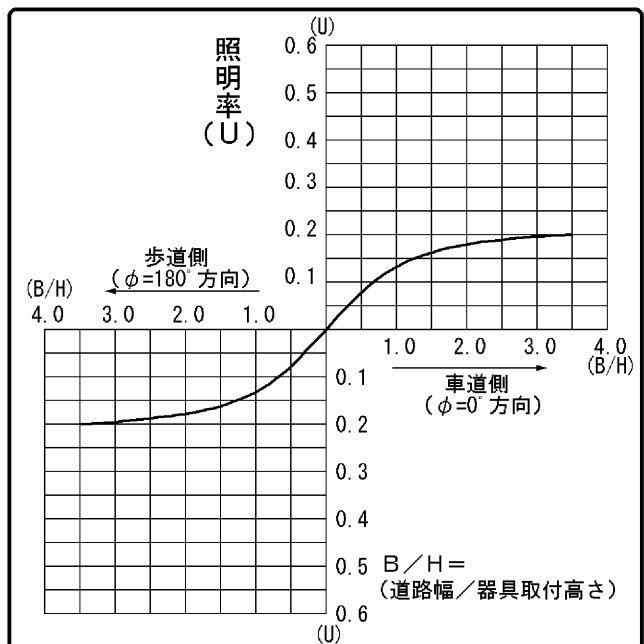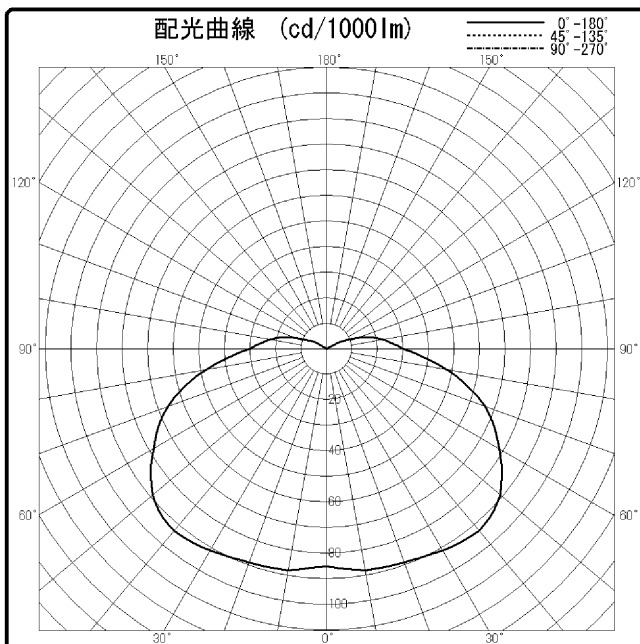

θ \ φ	0°	45°	90°	135°	180°
0°	85				
10°	88				
20°	89				
30°	91				
40°	93				
50°	89				
60°	78				
70°	66				
80°	48				
90°	30				
100°	22				
110°	13				
120°	4				
130°	1				
140°	0				
150°	0				
160°	0				
170°	0				
180°	0				

