

吊下げ連結使用例

Technical drawing of a 1247mm long metal beam with various mounting holes and dimensions. The drawing includes a top view and a side view.

Top View Dimensions and Features:


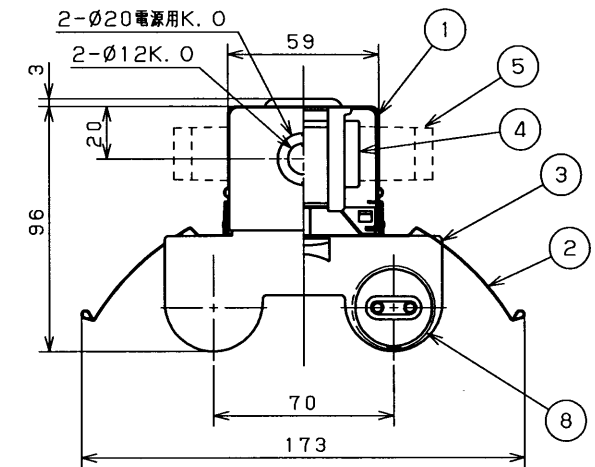

- Overall length: 1247mm
- End flange width: 70mm
- Distance from end flange to first hole: 70mm
- Distance between first and second hole: 200mm
- Distance between second and third hole: 350mm
- Distance between third and fourth hole: 470mm
- Distance between fourth and fifth hole: 600mm
- Distance between fifth and sixth hole: 800mm
- Distance from sixth hole to end flange: 70mm

Side View Dimensions and Features:

- Overall length: 1247mm
- Distance from end flange to first hole: 240mm
- Distance between first and second hole: 175mm
- Distance from second hole to end flange: 15mm
- Distance from third hole to end flange: 17mm

Labels and Callouts:

- 3- $\varnothing 20$ 電源用K. O (3x $\varnothing 20$ power K.O.)
- 2-12X20ボルト用穴 (2x 12x20 bolt hole)
- 4-連結用穴 (4x connection hole)
- 2-15X30ボルト用穴 (2x 15x30 bolt hole)
- 2-木ねじ用穴 (2x wood screw hole)
- 6 (Callout for $\varnothing 20$ power hole)
- $\varnothing 20$ 電源用穴 ($\varnothing 20$ power hole)
- 2- $\varnothing 21$ ボルト用および吊下げ用穴 (2x $\varnothing 21$ bolt and hanging hole)
- 7 (Callout for $\varnothing 21$ bolt/hanging hole)
- 2- $\varnothing 20$ 電源用K. O (両側面) (2x $\varnothing 20$ power K.O. on both sides)
- $\varnothing 12$ K. O ($\varnothing 12$ K.O.)

適合連結金具 C-62N (吊下げ専用)

- ・安定器表面は高温になります。中央電源穴以外を使用した配線を使用する場合は、耐熱性のある電線を使用、又は電線の熱保護を行ってください。電線が過熱し、感電、火災の原因となります。
- ・本器具は屋内専用ですと、風が吹く場所には使用できません。そのまま使用すると器具落下の原因となります。
- ・本器具は、天井・壁直付または吊下げ専用です。指定以外の取付を行なうと火災・器具落下の原因となります。吊り下げる場合は、適合する吊り具をご使用ください。
- ・適合ラップ以外は使用しないでください。

<生産完了 2009年03月01日>