


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43000WK

保守率	良	0.73
	中	0.69
	否	0.65


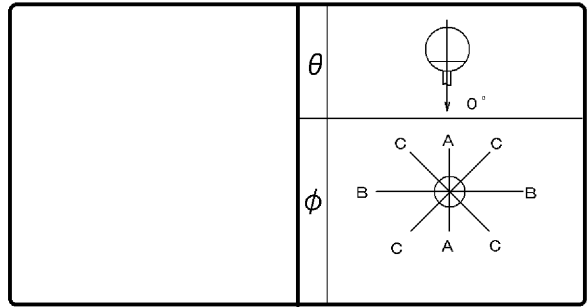


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F \cap	39.6 %
	F \cup	41.1 %
	F \circ	80.7 %
	器具光束	10251 lm

備考

前面	グローブ (乳白)
反射面	

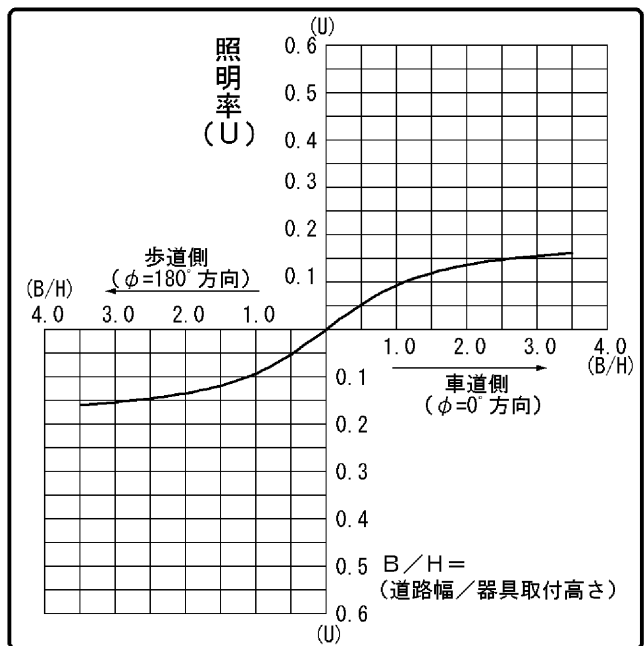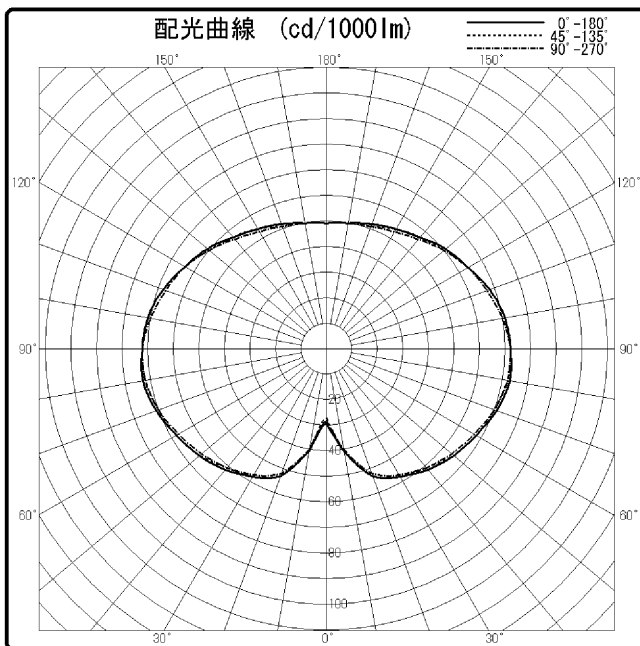

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	29	27	28	27	29
10°	41	41	40	41	41
20°	53	53	52	53	53
30°	58	58	57	58	58
40°	62	61	61	61	62
50°	65	65	64	65	65
60°	68	68	67	68	68
70°	71	70	70	70	71
80°	73	72	72	72	73
90°	72	72	72	72	72
100°	71	71	70	71	71
110°	68	68	67	68	68
120°	64	64	64	64	64
130°	61	60	60	60	61
140°	57	57	56	57	57
150°	54	54	53	54	54
160°	52	51	51	51	52
170°	50	50	50	50	50
180°	49	49	49	49	49

