


東芝ランプ 配光データシート

名称	ミニクリプトン (ワットブライター)
形名	KR100/110V2 4W
光束	275 lm × 1

保守率	良	0.88
	中	0.86
	否	0.81

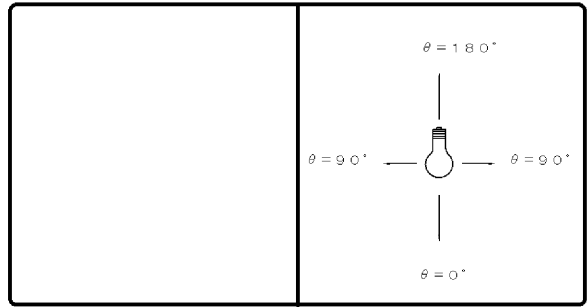

効率	F	%
	F	%
	F	100 %
	器具 光束	275 lm

最大取付間隔	
A-A	1.8 H
B-B	1.8 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	80		
10°	77		
20°	82		
30°	87		
40°	93		
50°	96		
60°	98		
70°	104		
80°	109		
90°	104		
100°	104		
110°	100		
120°	100		
130°	98		
140°	87		
150°	55		
160°	20		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																						
0.60	57	52	40	38	29	29	51	48	36	35	27	26	30	29	23	22	18	18	12	7			
0.80	67	61	49	46	38	37	61	55	45	43	35	34	37	36	29	28	24	23	17	11			
1.00	76	68	58	54	46	44	69	62	53	50	43	41	44	42	35	34	29	28	21	14			
1.25	83	74	66	61	54	51	75	68	61	56	50	47	50	47	41	40	34	33	25	18			
1.50	90	79	73	66	61	57	81	72	67	61	56	52	55	51	47	44	38	37	29	21			
2.00	99	86	84	75	72	65	89	79	76	69	66	61	63	58	55	52	44	43	34	26			
2.50	104	90	91	80	79	72	94	83	83	74	73	67	68	63	60	57	49	47	39	29			
3.00	109	93	96	84	86	76	98	86	88	78	78	71	72	66	65	60	53	50	42	32			
4.00	114	97	104	90	94	83	104	90	94	83	86	77	77	71	71	66	58	55	47	36			
5.00	118	100	109	93	101	87	107	93	99	87	92	81	81	74	76	70	61	58	50	39			
10.00	127	106	121	102	115	98	115	98	110	95	105	91	90	81	87	79	70	66	59	47			

