


東芝照明器具配光データシート

名称	昇降装置内蔵ダウンライト
形名	DDU-257M

保守率	良	0.79
	中	0.74
	否	0.70

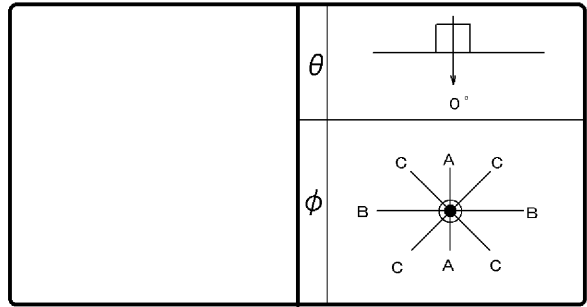

光源	名称	ネオハロゲンランプ
	形名	JD100/110V2 50W-E
	光束	4500 lm × 1

効率	F	0%
	F	78%
	F	78%
	器具光束	3519 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考	
----	--

前面	カバー (透明)
反射面	電解研磨つちめ仕上

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		1166	
10°		1003	
20°		712	
30°		253	
40°		97	
50°		84	
60°		9	
70°		6	
80°		4	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0			
室指数	照明率 (×0.01)																			
0.60	64	59	56	53	51	50	63	59	56	53	51	49	55	52	50	49	50	49	47	46
0.80	72	65	64	60	58	56	70	64	63	59	58	56	61	59	57	55	56	55	53	52
1.00	77	69	70	65	64	61	76	69	69	64	64	61	67	63	63	60	62	60	58	57
1.25	81	72	74	68	69	65	79	71	73	67	68	64	70	66	66	64	65	63	61	60
1.50	84	74	77	70	72	67	82	73	76	70	71	67	73	69	69	66	68	65	63	62
2.00	88	77	82	73	78	71	86	76	80	73	76	70	77	72	74	69	71	69	67	65
2.50	91	78	85	75	81	73	88	77	83	75	79	73	79	73	76	72	74	71	69	68
3.00	93	79	88	77	84	75	90	78	86	76	82	74	81	75	79	73	75	72	70	69
4.00	95	81	91	79	88	77	92	80	89	78	86	77	84	77	82	75	78	74	73	72
5.00	97	82	94	80	91	79	93	81	91	79	88	78	86	78	84	77	80	76	74	73
10.00	100	84	98	83	97	82	96	83	95	82	94	82	89	81	88	80	83	79	78	76

