


東芝照明器具配光データシート

名称	H I D埋込ダウンライト
形名	DD-0745 (S)

保守率	良	0.61
	中	0.58
	否	0.54

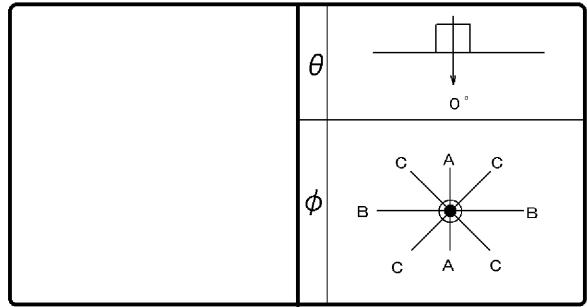

光源	名称	ネオアーク
	形名	MTS70/N
	光束	5000 lm × 1

効率	F	0%
	F	55%
	F	55%
	器具光束	2732 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

前面	カバー (フロスト)
反射面	銀色鏡面仕上げ

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	292		
10°	288		
20°	271		
30°	244		
40°	193		
50°	96		
60°	28		
70°	4		
80°	1		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	0
室指数	照 明 率 (×0.01)																		
0.60	38	35	31	29	26	26	37	34	30	29	26	25	30	28	26	25	25	23	22
0.80	44	40	37	35	33	31	43	39	37	35	33	31	36	34	32	31	31	29	28
1.00	49	44	43	40	38	36	48	44	42	39	38	36	41	39	37	36	36	33	33
1.25	53	47	47	43	43	40	52	46	46	43	42	40	45	42	41	39	40	39	37
1.50	56	49	51	46	46	43	54	49	49	45	46	43	47	44	44	42	43	42	40
2.00	60	52	55	49	51	47	58	51	54	49	50	47	51	48	49	46	47	45	44
2.50	62	53	58	51	55	49	60	53	56	51	53	49	54	50	51	48	49	47	46
3.00	63	54	60	52	57	51	61	54	58	52	56	50	55	51	53	49	51	49	47
4.00	65	56	62	54	60	53	63	55	61	53	58	52	57	52	55	51	53	50	49
5.00	66	56	64	55	62	54	64	55	62	54	60	53	58	53	57	52	54	51	50
10.00	69	57	67	57	66	56	66	57	65	56	64	55	61	55	60	54	56	53	52

