


# 東芝ランプ 配光データシート

名称	蛍光ランプ
形名	FLR40S・W/M
光束	3000 lm × 1

保守率	良	0.74
	中	0.70
	否	0.61

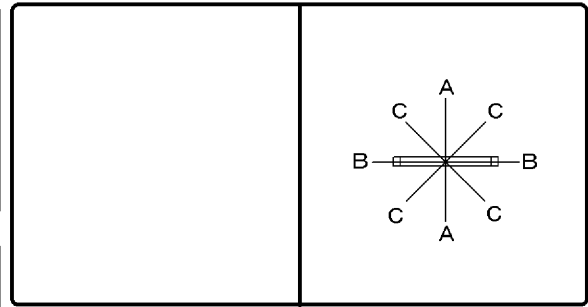

効率	F	%
	F	%
	F	100 %
	器具光束	3000 lm

最大取付間隔	
A-A	1.5 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta$	A-A	B-B	C-C
0°	109	109	109
10°	109	108	108
20°	108	101	107
30°	108	90	105
40°	108	75	102
50°	107	60	99
60°	108	41	95
70°	108	23	87
80°	108	8	81
90°	108	0	74
100°	108	8	81
110°	108	23	87
120°	108	41	95
130°	107	60	99
140°	108	75	102
150°	107	90	105
160°	108	101	107
170°	109	108	108
180°	109	109	109

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	10	0	
室指数	照明率 (×0.01)																			
0.60	54	49	39	37	30	29	49	45	35	34	27	27	30	28	23	22	19	18	13	9
0.80	63	57	48	45	38	36	57	52	44	41	35	34	36	35	30	29	24	24	18	13
1.00	72	64	56	52	46	43	65	59	51	48	42	40	43	40	35	34	29	28	22	16
1.25	79	70	64	58	53	50	71	64	58	54	49	46	48	45	41	39	34	33	26	19
1.50	84	74	70	63	59	55	76	68	64	59	55	51	53	49	46	44	37	36	29	22
2.00	92	80	79	71	69	63	83	74	72	66	64	59	60	55	53	50	43	42	34	26
2.50	97	84	86	76	76	69	88	77	78	70	70	64	64	59	58	54	47	45	38	29
3.00	101	87	91	79	82	73	91	80	83	74	75	68	68	62	62	58	50	48	41	32
4.00	106	90	97	84	90	79	96	83	89	78	82	73	72	66	68	63	55	52	45	35
5.00	109	92	102	87	95	83	99	86	92	81	87	77	76	69	71	66	58	55	48	37
10.00	116	97	112	94	108	91	105	90	102	88	98	85	83	75	80	73	65	61	54	43

