


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13112K+ZL-300+CL-300 (2)

保守率	良	0.73
	中	0.69
	否	0.65


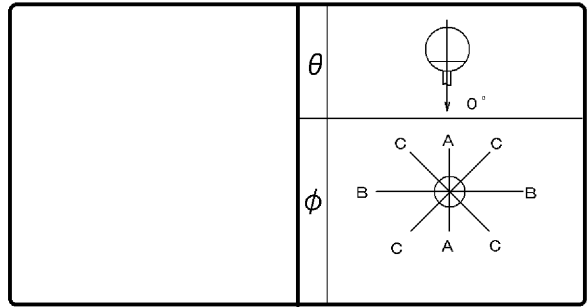


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F	11.6 %
	F	29.0 %
	F	40.6 %
	器具光束	1703 lm

備考 2方向遮光

前面	グローブ (透明)
反射面	

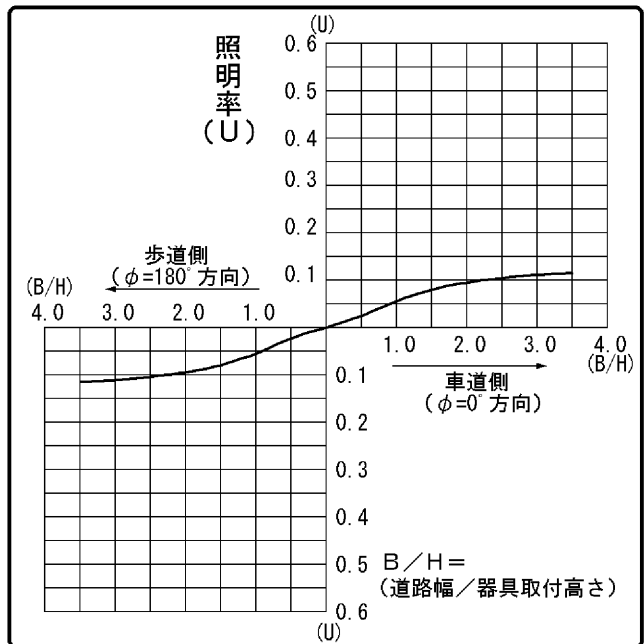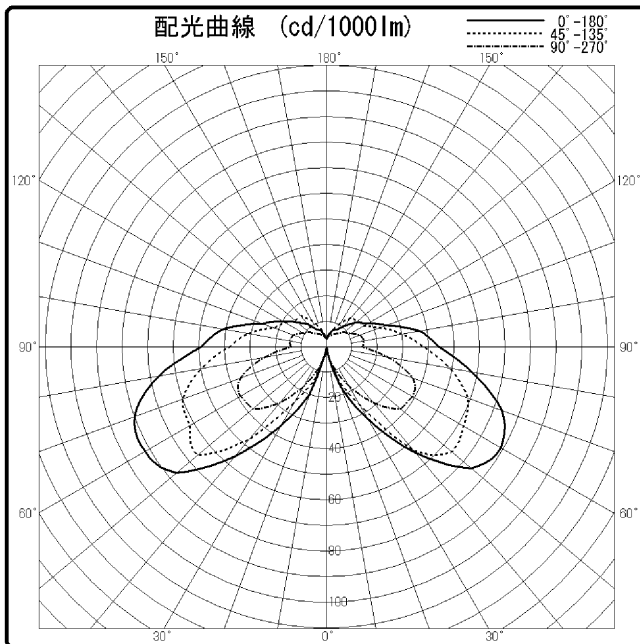

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	0	0	0	0	0
10°	2	3	2	2	3
20°	16	14	8	14	20
30°	33	27	18	25	36
40°	54	53	29	47	56
50°	74	64	38	66	77
60°	79	62	39	62	82
70°	73	59	36	60	80
80°	58	49	25	50	67
90°	44	38	14	38	49
100°	37	30	15	31	41
110°	25	22	14	22	27
120°	19	17	11	19	20
130°	15	16	9	16	15
140°	11	15	7	16	12
150°	8	11	6	12	8
160°	7	7	5	8	7
170°	5	4	4	5	4
180°	3	3	3	3	3

