


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43001K+C L-301

保守率	良	0.73
	中	0.69
	否	0.65


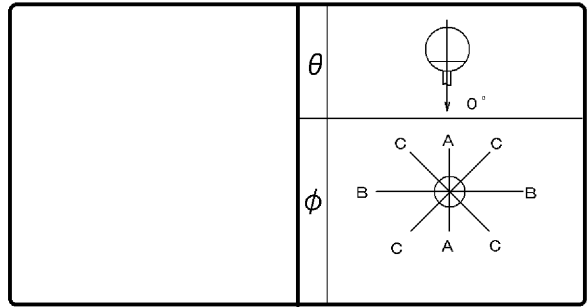


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F \cap	25.8 %
	F \cup	34.6 %
	F \circ	60.3 %
	器具光束	7664 lm

備考

前面	グローブ (透明)
反射面	

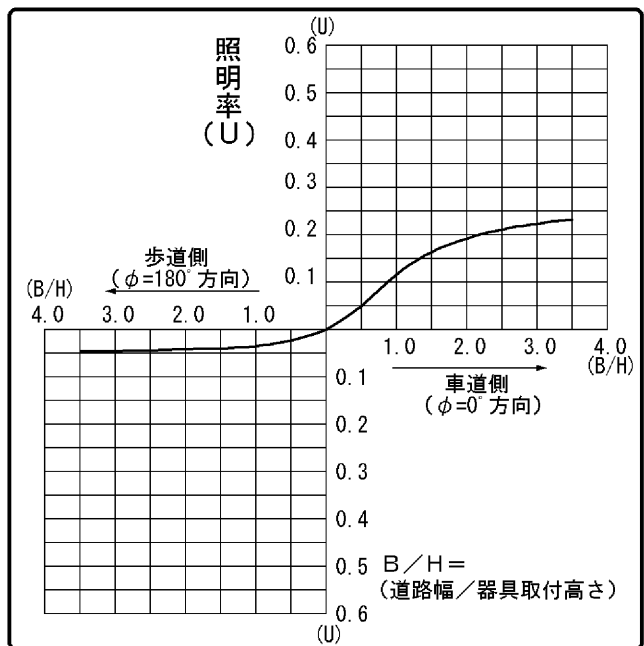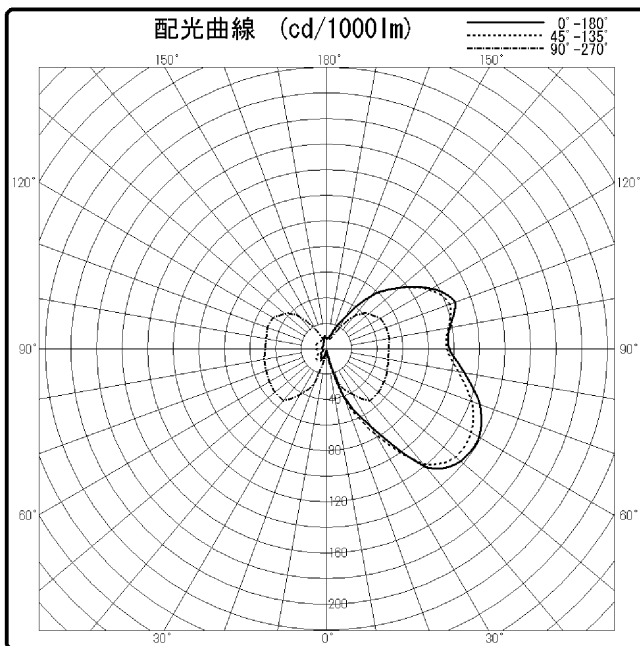

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	4	9	5	3	2
20°	39	44	29	9	7
30°	72	78	42	12	9
40°	121	118	53	12	7
50°	137	132	53	11	6
60°	138	131	52	8	4
70°	128	121	51	7	3
80°	110	105	50	8	3
90°	96	94	49	8	3
100°	98	97	50	8	4
110°	107	103	50	9	4
120°	95	93	49	9	4
130°	74	74	43	10	4
140°	54	53	33	8	4
150°	28	28	17	7	4
160°	13	11	8	8	7
170°	9	9	10	11	10
180°	8	8	8	8	8

