


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43001K+ZL-300+CL-300

保守率	良	0.73
	中	0.69
	否	0.65


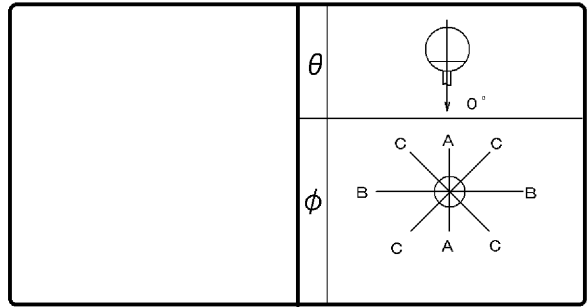


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F \cap	10.6 %
	F \cup	31.3 %
	F \circ	41.9 %
	器具光束	5315 lm

備考 側方遮光

前面	グローブ (透明)
反射面	

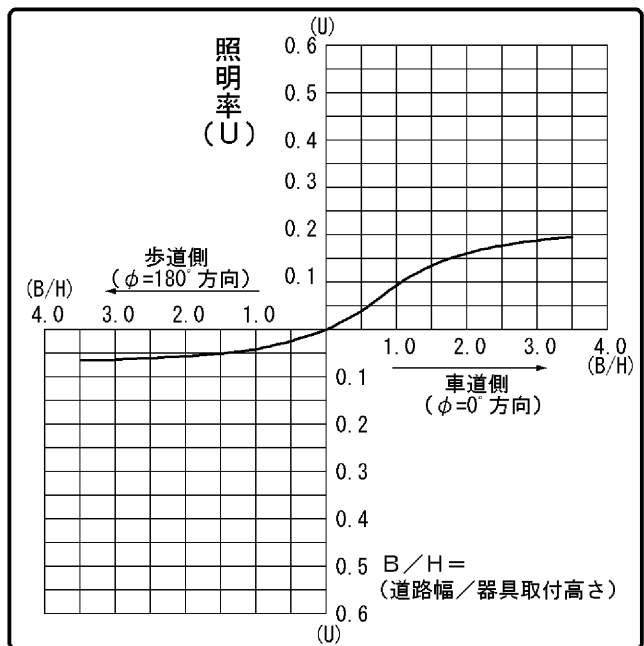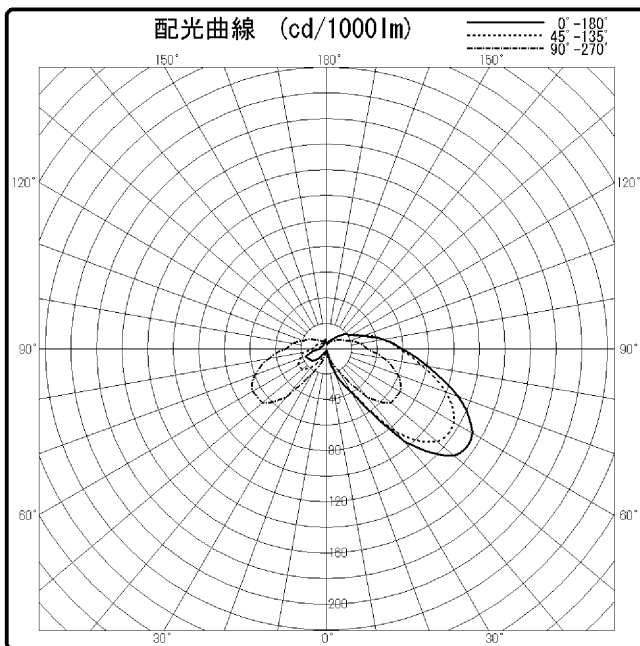

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	2	5	3	3	2
20°	21	20	12	6	2
30°	40	39	23	11	5
40°	95	86	50	20	10
50°	130	113	66	25	15
60°	132	115	67	26	20
70°	110	100	60	24	18
80°	81	76	46	19	11
90°	59	57	32	11	5
100°	45	45	27	11	6
110°	30	32	20	9	5
120°	23	24	15	8	4
130°	18	18	11	6	4
140°	13	13	9	6	4
150°	9	9	7	6	5
160°	6	7	7	8	6
170°	4	5	6	8	8
180°	4	4	4	4	4

