


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43001K+ZL-300+CL-300 (2)

保守率	良	0.73
	中	0.69
	否	0.65


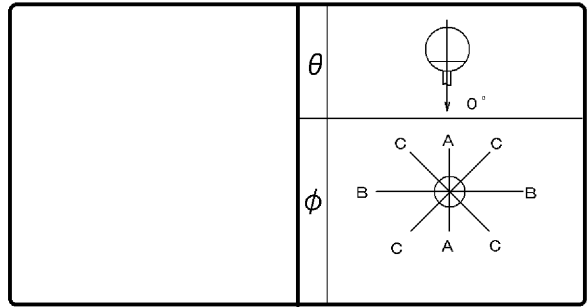


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F	10.6 %
	F	30.8 %
	F	41.4 %
	器具光束	5264 lm

備考 2方向遮光

前面	グローブ (透明)
反射面	

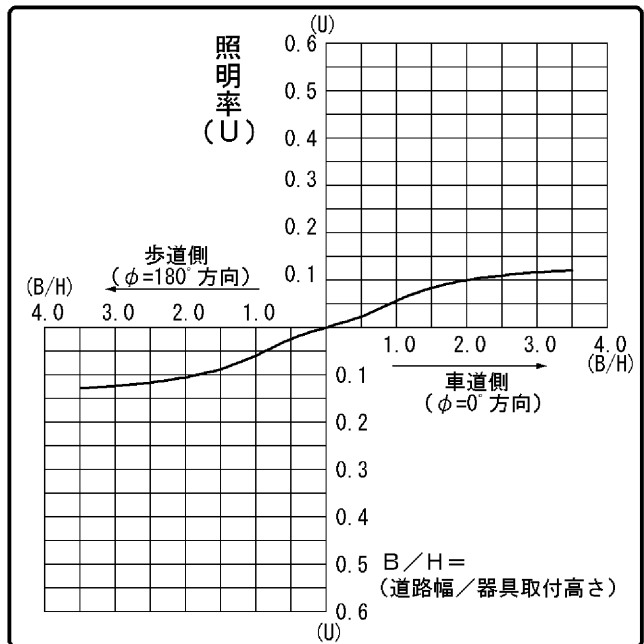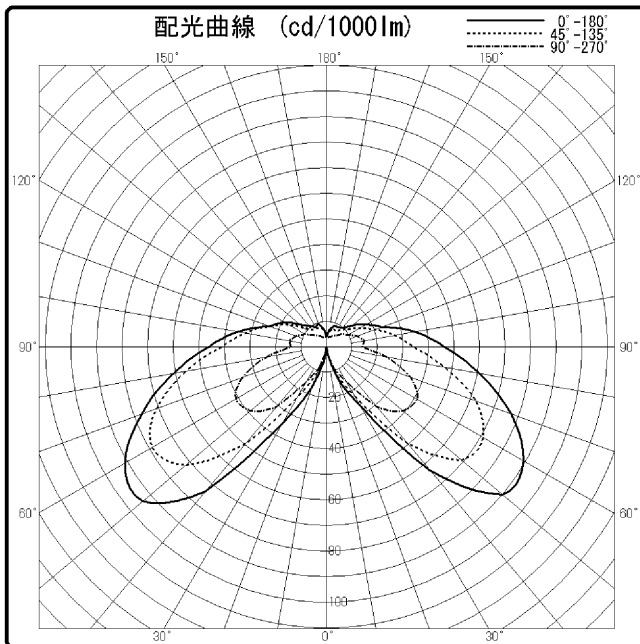

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	0	1	0	1	0
10°	2	3	2	3	6
20°	13	11	8	11	17
30°	27	23	16	23	35
40°	63	49	31	49	74
50°	90	69	39	72	94
60°	89	71	41	79	91
70°	77	62	35	71	77
80°	61	47	24	56	61
90°	46	34	14	41	46
100°	35	27	15	32	35
110°	23	20	13	24	24
120°	18	15	10	17	19
130°	13	11	8	12	14
140°	10	9	6	9	11
150°	9	7	5	8	9
160°	9	8	4	8	10
170°	7	6	4	7	7
180°	4	5	4	5	4

