


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43112K

保守率	良	0.73
	中	0.69
	否	0.65


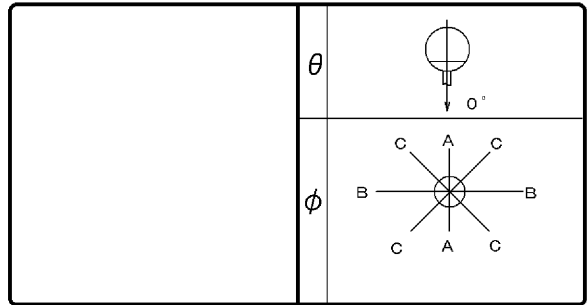


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F $\frac{1}{2}$	40.0 %
	F $\frac{3}{4}$	47.5 %
	F \bigcirc	87.5 %
	器具光束	11115 lm

備考

前面	グローブ (透明)
反射面	

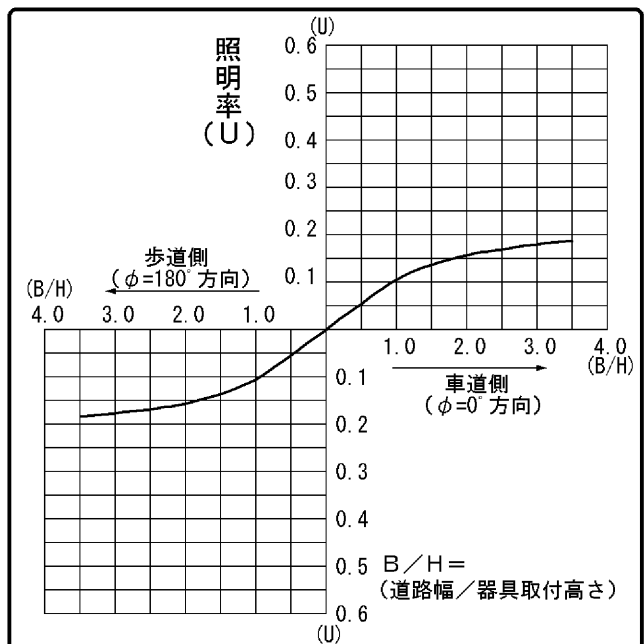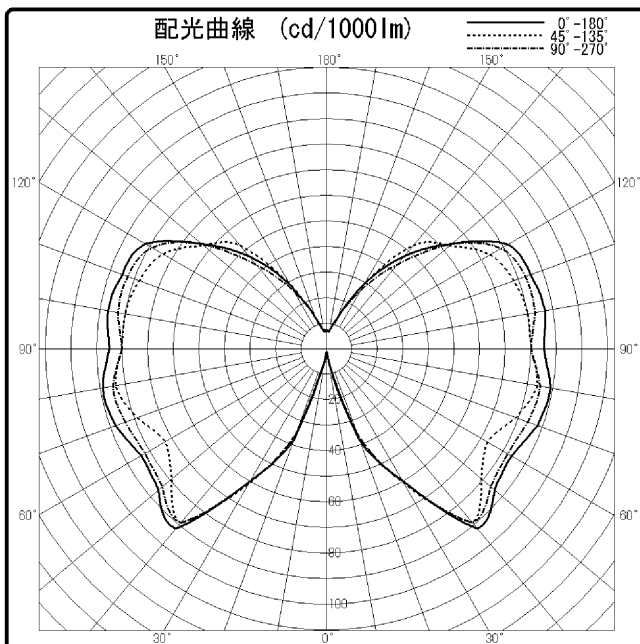

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	6	4	5	4	6
20°	38	35	36	35	38
30°	60	61	60	61	60
40°	92	89	89	89	92
50°	86	79	84	79	86
60°	84	73	82	73	84
70°	88	79	84	79	88
80°	89	84	85	84	89
90°	85	80	80	80	85
100°	87	80	83	80	87
110°	85	78	83	78	85
120°	82	74	79	74	82
130°	64	63	64	63	64
140°	47	53	43	53	47
150°	29	30	26	30	29
160°	13	13	13	13	13
170°	7	7	8	7	7
180°	7	7	7	7	7

