


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43112K+C L-301

保守率	良	0.73
	中	0.69
	否	0.65


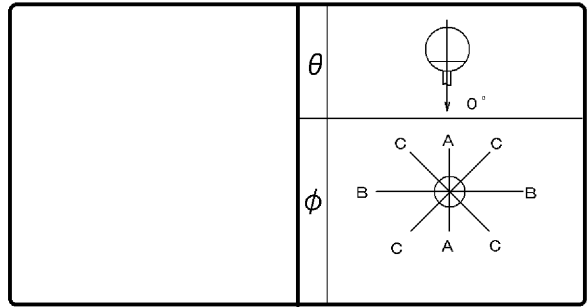


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F	26.2 %
	F	32.3 %
	F	58.5 %
	器具光束	7435 lm

備考

前面	グローブ (透明)
反射面	

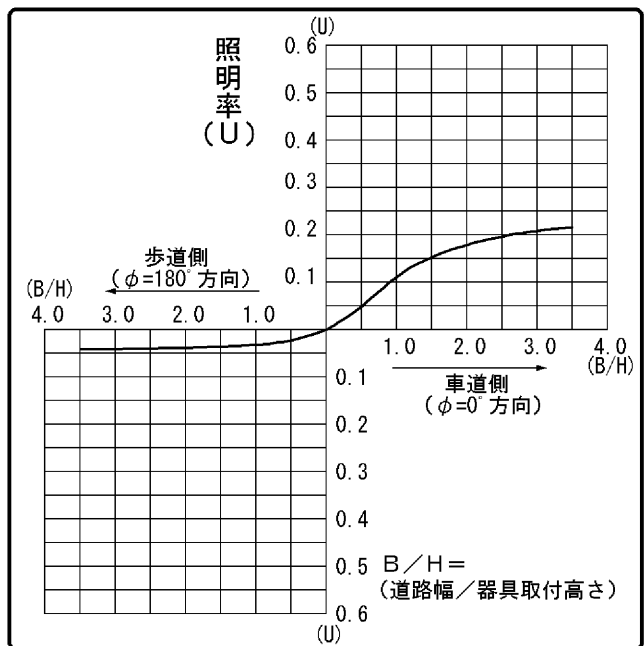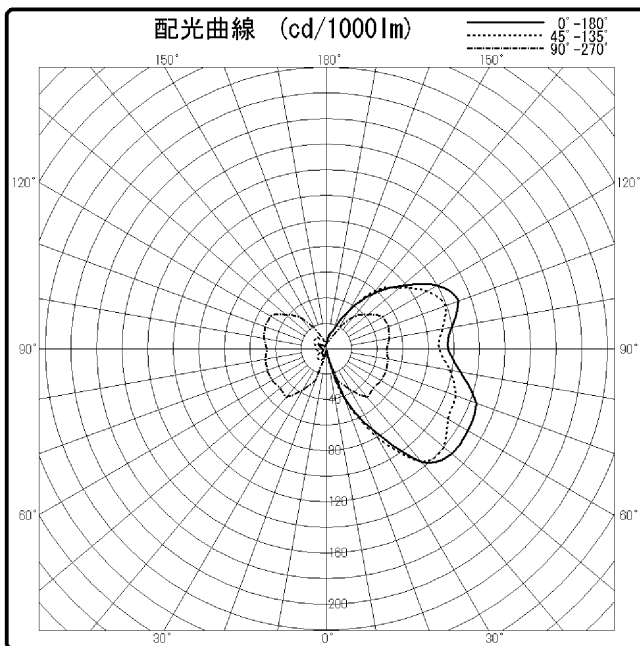

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	6	9	4	3	3
20°	41	42	27	8	7
30°	74	81	37	11	6
40°	116	116	50	9	7
50°	128	120	48	10	5
60°	128	110	50	6	4
70°	125	108	50	7	3
80°	107	98	49	8	4
90°	95	88	47	8	3
100°	100	92	50	9	4
110°	110	99	52	10	6
120°	100	91	51	12	8
130°	77	74	42	12	5
140°	56	60	32	13	3
150°	33	33	17	11	4
160°	15	15	8	7	5
170°	12	10	6	5	3
180°	5	5	5	5	5

