

東芝照明器具配光データシート


名称	LEDダウンライト
形名	LEDD-66004W-LS1

光源	名称	LED
	形名	LEM-066003 (W)
	光束	309 lm × 1

前面	カバー (透明)
反射面	白色

保守率	良	1.00
	中	1.00
	否	1.00

効率	F ◡	0 %
	F ◩	86 %
	F ○	86 %
	器具光束	265 lm

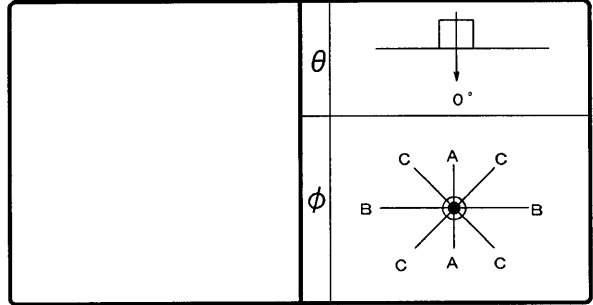

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1292		
10°	1110		
20°	711		
30°	347		
40°	139		
50°	44		
60°	14		
70°	5		
80°	3		
90°	2		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	70	50	70	50		
0.60	71	65	62	59	57	55	70	65	61	59	56	55	60	58	56	54	55	54	52	50
0.80	79	72	70	66	65	62	77	71	69	65	64	62	68	65	63	61	62	61	58	57
1.00	85	77	77	71	71	68	83	76	76	71	71	67	74	70	69	67	68	66	64	63
1.25	89	79	82	75	76	71	87	79	80	74	75	71	78	73	73	70	72	70	67	66
1.50	93	82	85	77	80	74	90	81	84	77	79	74	81	76	77	73	75	72	70	69
2.00	97	84	91	81	85	78	94	83	89	80	84	78	85	79	81	77	79	76	74	72
2.50	100	86	94	83	89	81	97	85	92	82	88	80	87	81	84	79	81	78	76	74
3.00	102	87	97	85	92	82	98	86	94	84	90	82	89	82	86	81	83	79	78	76
4.00	104	89	100	87	97	85	101	88	97	86	94	84	92	84	90	83	86	82	80	79
5.00	106	90	103	88	100	87	102	89	99	87	97	86	94	85	92	84	87	83	82	80
10.00	109	92	108	91	106	90	106	91	104	90	103	89	98	88	97	88	91	86	85	83

