


# 東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JR12V20W/K5M
光束	320 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

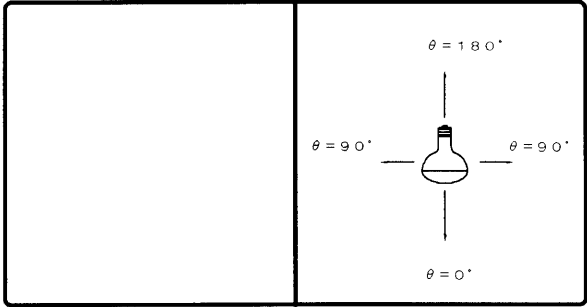

効率	F	%
	F	%
	F	100 %
	器具光束	320 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考

0°	5000	25°	141
1°		30°	125
2°		35°	109
3°		40°	125
4°		45°	125
5°	4063	50°	125
6°		55°	78
7°		60°	47
8°		65°	31
9°		70°	16
10°	2500	75°	16
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	984		
16°			
17°			
18°			
19°			
20°	297		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		70		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数	照明率 (×0.01)																																				
0.60	90	83	79	75	73	71	88	82	78	75	73	70	77	74	72	70	71	69	67	65																	
0.80	98	89	88	82	81	78	96	88	87	82	80	77	84	80	79	77	78	76	73	72																	
1.00	105	94	94	88	88	83	102	93	93	87	87	83	90	85	85	82	83	81	78	76																	
1.25	109	97	99	91	92	87	106	95	97	90	91	86	94	88	89	85	86	84	81	79																	
1.50	112	99	103	94	96	89	109	98	101	93	95	89	97	91	92	87	89	86	83	82																	
2.00	118	102	109	98	103	94	114	101	107	97	101	93	102	94	97	91	93	90	87	85																	
2.50	121	104	114	100	108	97	117	103	111	99	105	96	105	97	101	94	97	93	90	88																	
3.00	124	106	117	103	112	100	120	105	114	102	109	99	108	99	104	97	99	95	93	91																	
4.00	127	108	122	106	118	104	123	107	119	105	115	103	112	102	109	101	104	99	97	94																	
5.00	130	110	126	108	122	107	125	108	122	107	119	105	115	104	112	103	106	101	99	97																	
10.00	135	113	134	113	132	112	130	112	129	111	128	111	120	109	120	109	112	106	105	103																	

