


東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JR12V20W/K5 FEZ
光束	320 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

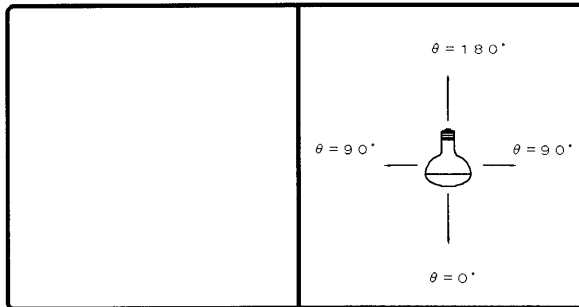

効率	F	%
	F	%
	F	100 %
	器具光束	320 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考

光度 (cd/1000lm)			
0°	2438	25°	497
1°		30°	172
2°		35°	94
3°		40°	78
4°		45°	63
5°	2281	50°	47
6°		55°	31
7°		60°	16
8°		65°	9
9°		70°	9
10°	1959	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	1500		
16°			
17°			
18°			
19°			
20°	1050		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	照明率 (×0.01)																			
0.60	93	85	83	79	77	75	91	84	82	78	77	74	81	78	76	74	75	74	71	70
0.80	101	91	91	86	85	82	99	91	90	85	85	82	88	84	83	81	82	81	78	77
1.00	107	96	98	91	92	87	105	95	97	90	91	87	94	89	89	86	88	86	83	82
1.25	111	99	102	94	96	90	108	98	101	93	95	90	98	92	93	89	91	88	86	85
1.50	114	101	106	96	100	93	111	99	104	95	98	92	100	94	96	91	93	90	88	87
2.00	119	103	111	99	105	96	115	102	109	98	103	96	104	97	100	94	97	93	91	89
2.50	121	105	115	102	110	99	118	104	112	101	107	98	107	99	103	97	99	95	93	92
3.00	124	106	118	103	113	101	120	105	115	102	111	100	109	101	106	99	102	97	95	94
4.00	127	108	122	106	118	104	123	107	119	105	116	103	113	103	110	102	105	100	98	97
5.00	129	109	126	108	122	106	125	108	122	107	119	105	115	105	113	104	107	102	101	99
10.00	134	112	132	112	131	111	129	111	128	110	127	110	120	108	119	108	113	106	105	104

