


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-23552C (K)

保守率	良	0.50
	中	0.47
	否	0.44


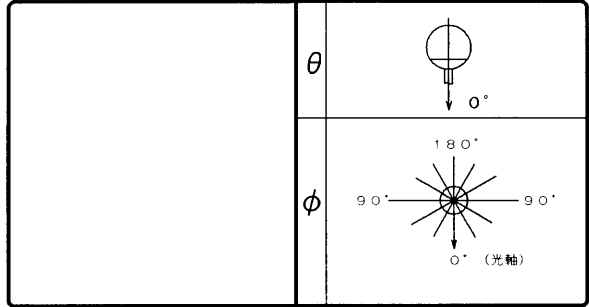


光源	名称	HL-ネオハライド2
	形名	MF250L-J2/B D-PS
	光束	22000 lm x 1

効率	F	4.7 %
	F	39.4 %
	F	44.2 %
	器具光束	9714 lm

備考

前面	グローブ (透明)
反射面	塗装 (白)

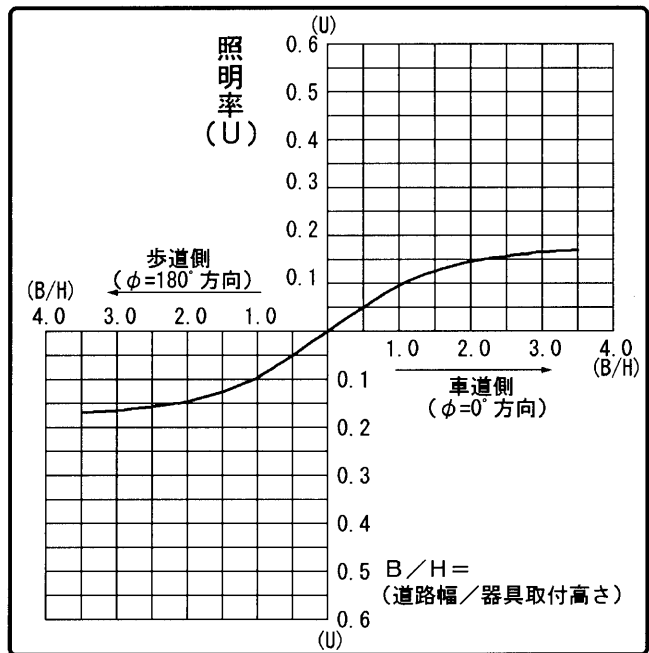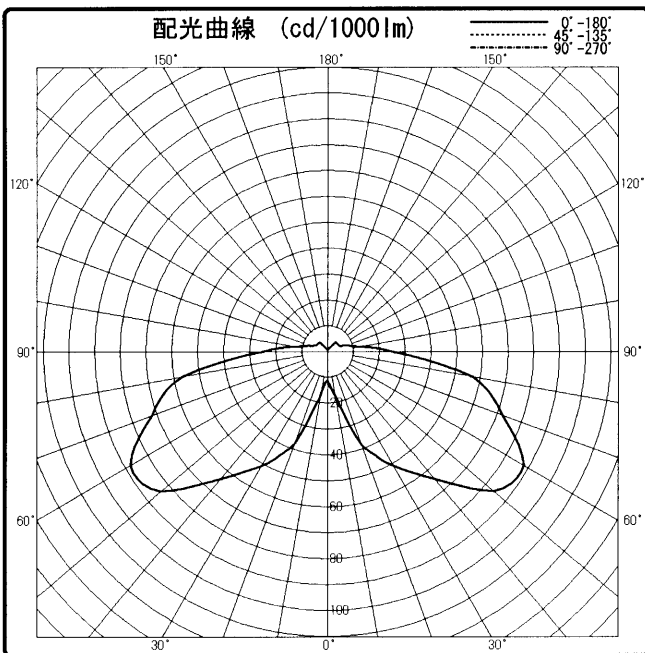

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	11				
10°	18				
20°	38				
30°	51				
40°	64				
50°	84				
60°	88				
70°	72				
80°	57				
90°	25				
100°	12				
110°	7				
120°	5				
130°	5				
140°	5				
150°	1				
160°	1				
170°	1				
180°	1				

