


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-23562C (K)

保守率	良	0.50
	中	0.47
	否	0.44


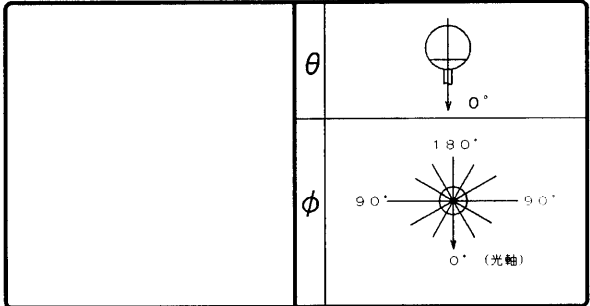


光源	名称	HL-ネオハライド2
	形名	MF250L-J2/B D-PS
	光束	22000 lm x 1

効率	F $\frac{1}{2}$	4.8 %
	F $\frac{1}{4}$	40.2 %
	F \bigcirc	44.9 %
	器具光束	9886 lm

備考

前面	グローブ (透明)
反射面	塗装 (白)

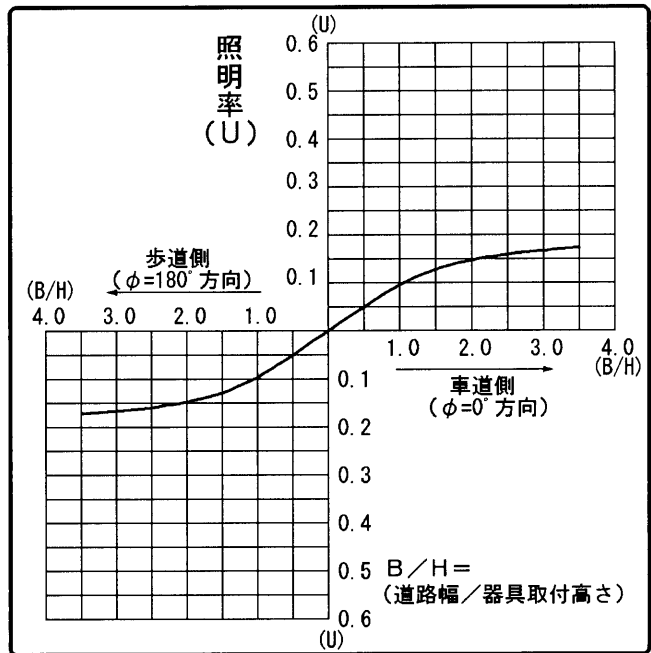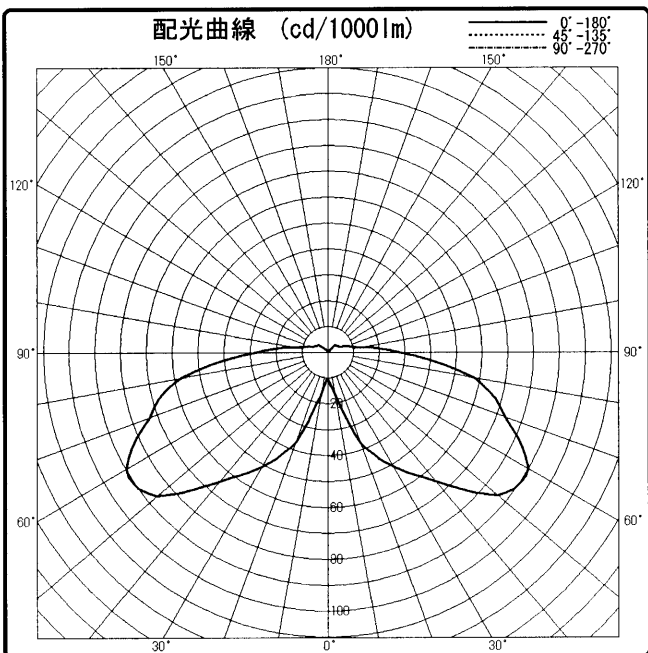

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	10				
10°	17				
20°	37				
30°	51				
40°	65				
50°	86				
60°	90				
70°	73				
80°	58				
90°	28				
100°	12				
110°	7				
120°	5				
130°	5				
140°	4				
150°	1				
160°	0				
170°	0				
180°	0				

