


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-23563C (S)

保守率	良	0.50
	中	0.47
	否	0.44


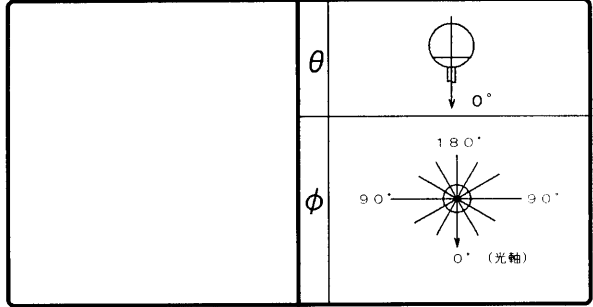


光源	名称	HL-ネオハライド2
	形名	MF250L-J2/B D-PS
	光束	22000 lm x 1

効率	F	8.2 %
	F	45.9 %
	F	54.0 %
	器具光束	11885 lm

備考

前面	グローブ (透明)
反射面	塗装 (白)

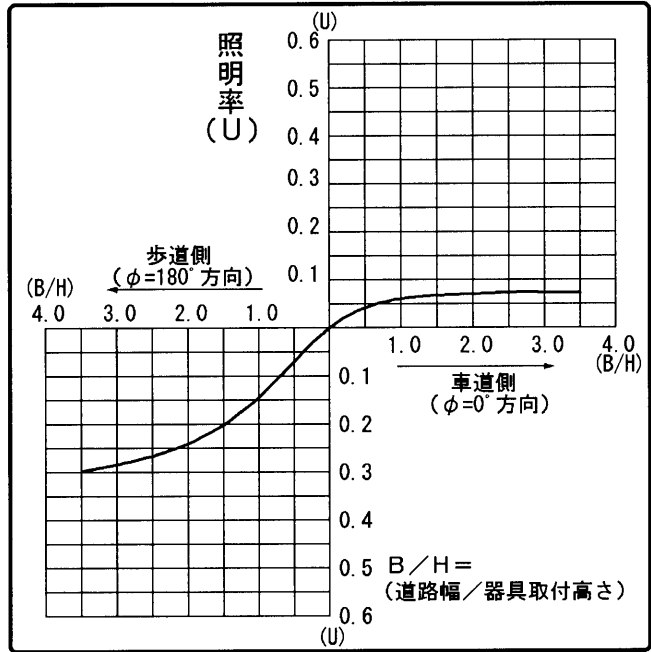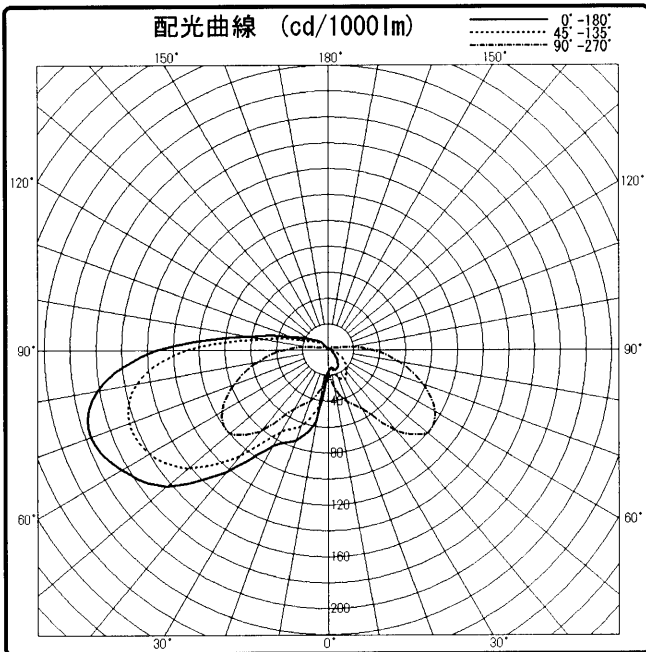

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	17	17	17	17	17
10°	14	14	30	45	56
20°	17	23	43	63	75
30°	15	26	53	73	86
40°	11	22	82	107	123
50°	7	18	100	142	164
60°	4	13	95	160	185
70°	3	7	78	164	196
80°	3	4	56	151	182
90°	3	2	34	110	133
100°	3	1	15	49	62
110°	2	1	7	22	30
120°	2	1	5	14	17
130°	2	0	4	9	12
140°	2	0	3	6	8
150°	2	0	0	0	2
160°	2	0	0	0	2
170°	2	0	0	0	2
180°	1	1	1	1	1

