


東芝ランプ 配光データシート

名称	ミニクリLED電球
形名	LDA3L-E17
光束	220 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

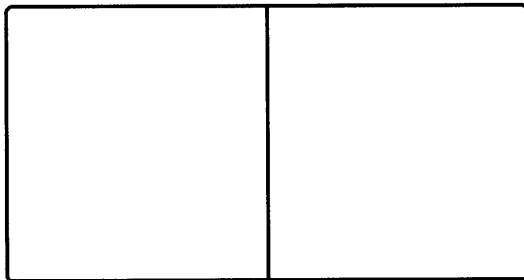

効率		
器具光束	220 lm	
	100 %	

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考	
----	--

光度 (cd/1000lm)		
θ	φ	A-A
0°		255
10°		255
20°		253
30°		238
40°		209
50°		171
60°		122
70°		73
80°		42
90°		25
100°		0
110°		0
120°		0
130°		0
140°		0
150°		0
160°		0
170°		0
180°		0

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30			30	10	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数		照明率 (×0.01)																			
	0.60	49	45	37	35	29	28	48	44	36	34	29	28	35	33	28	28	28	27	23	22
	0.80	58	53	46	43	38	36	56	52	45	42	37	36	43	41	36	35	35	35	31	29
	1.00	66	59	54	50	46	43	64	58	53	49	45	43	50	48	44	42	42	41	37	35
	1.25	72	64	61	56	53	49	70	63	59	55	52	49	57	53	50	48	48	47	43	41
	1.50	77	68	66	60	58	54	75	67	65	59	57	54	61	58	55	53	53	51	47	45
	2.00	84	73	75	67	67	61	81	72	72	66	66	61	68	64	63	59	60	58	54	52
	2.50	88	76	80	71	73	66	85	75	77	69	71	65	73	67	68	64	65	62	59	57
	3.00	91	78	84	73	77	69	88	77	81	72	75	68	76	70	72	67	68	65	62	60
	4.00	95	81	89	77	84	73	92	80	86	76	81	73	81	74	77	71	73	69	66	64
	5.00	98	83	92	79	88	76	94	81	89	78	85	75	83	76	80	73	76	72	69	67
	10.00	103	86	100	84	97	82	99	85	96	83	93	81	89	81	87	79	82	77	75	73

