

# 東芝照明器具配光データシート


名称	街路照明器具
形名	HG-23551W (K)

光源	名称	H L-ネオハイドランプ
	形名	MF250L-J2/B D-PS
	光束	22000 lm × 1



前面	グローブ (乳白)
反射面	塗装 (白)

保守率	良	0.50
	中	0.47
	否	0.44

効率	F $\frac{1}{2}$	12.6 %
	F $\frac{3}{4}$	30.5 %
	F ○	43.0 %
	器具光束	9465 lm

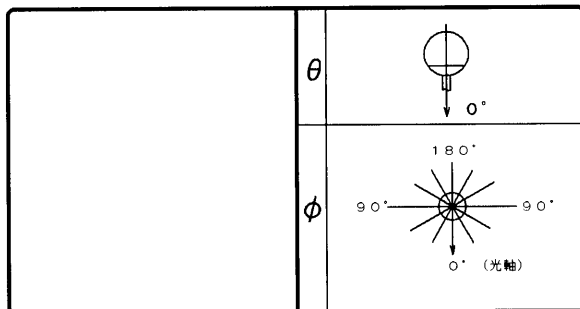

備考

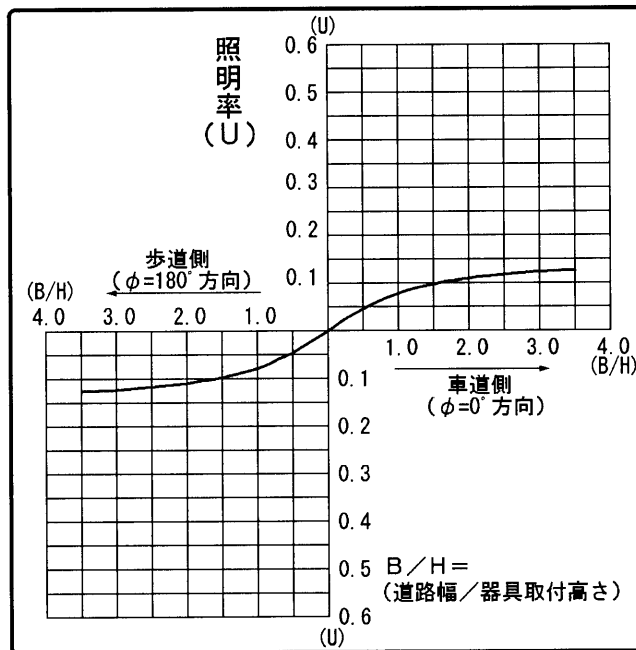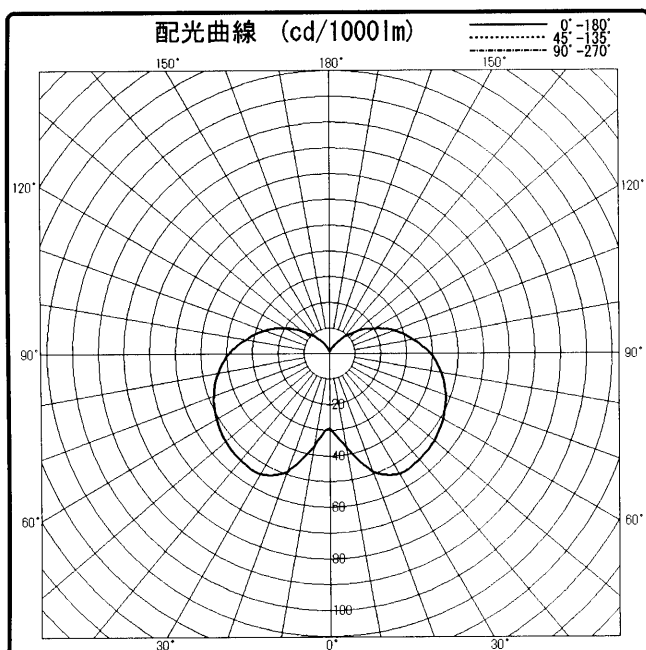

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	29				
10°	37				
20°	49				
30°	54				
40°	54				
50°	53				
60°	51				
70°	48				
80°	44				
90°	39				
100°	33				
110°	27				
120°	20				
130°	14				
140°	9				
150°	5				
160°	2				
170°	1				
180°	2				

