


東芝照明器具配光データシート

名称	LEDライン器具
形名	LEDL-09901L-LS1

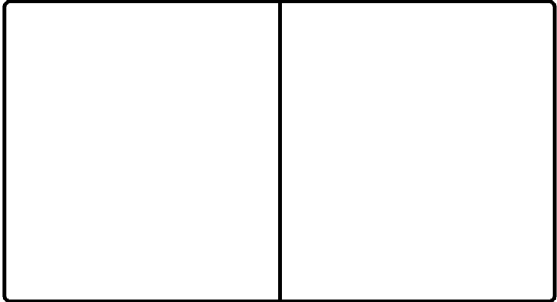

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	685 lm

保守 率	良	0.69
	中	0.67
	否	0.63

前面	カバー（透明）
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	376	376	376
10°	345	367	358
20°	322	346	324
30°	297	315	291
40°	261	272	257
50°	213	213	212
60°	158	140	155
70°	93	64	92
80°	36	17	35
90°	9	1	11
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	61	56	46	44	37	36	59	54	45	43	37	36	44	42	36	35	35	35	30	28
0.80	72	65	57	54	48	46	70	64	56	53	47	45	54	51	46	45	45	44	39	37
1.00	81	73	67	62	57	54	79	71	66	61	57	54	63	60	55	53	54	52	47	45
1.25	89	79	75	69	66	62	86	77	74	68	65	61	70	66	63	60	61	59	55	52
1.50	95	83	82	75	73	68	92	82	80	74	72	67	76	72	69	66	67	65	60	58
2.00	103	90	92	82	83	76	99	88	90	81	82	75	85	79	78	74	76	73	69	66
2.50	108	93	98	87	90	81	104	91	95	86	88	81	90	83	85	79	81	78	74	72
3.00	112	96	103	90	96	85	107	94	100	89	93	85	94	87	89	83	85	81	78	76
4.00	116	99	109	94	103	91	112	97	106	93	100	90	99	91	95	88	90	86	83	81
5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	94	99	91	94	89	86	84
10.00	125	104	122	102	118	101	120	103	117	101	115	100	109	99	107	97	101	95	93	91

