


■ 東芝ランプ 配光データシート

名 称	東芝電球型LEDランプ
形 名	LDR14L-W
光 束	630 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

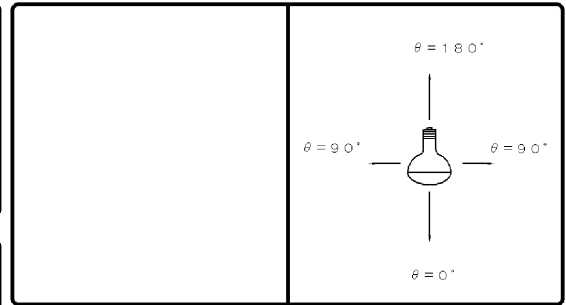

効 率	F	%
	F	%
	F	100 %
	器具 光束	630 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
0°	3245	25°	373
1°	3243	30°	234
2°	3218	35°	158
3°	3178	40°	93
4°	3114	45°	51
5°	3032	50°	25
6°	2921	55°	10
7°	2803	60°	5
8°	2654	65°	3
9°	2497	70°	2
10°	2309	75°	2
11°	2140	80°	1
12°	1953	85°	1
13°	1792	90°	1
14°	1618		
15°	1454		
16°	1285		
17°	1140		
18°	992		
19°	871		
20°	748		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	93	86	84	80	78	76	91	85	83	79	78	76	82	78	77	75	76	75	73	72			
0.80	101	91	92	86	86	82	99	91	91	86	85	82	89	85	84	82	83	81	79	78			
1.00	107	96	98	91	92	87	104	95	97	90	91	87	94	89	90	87	88	86	84	83			
1.25	110	98	102	94	96	90	108	97	100	93	95	90	97	92	93	89	91	88	86	85			
1.50	113	100	105	96	99	92	110	99	103	95	98	92	100	93	95	91	93	90	88	87			
2.00	117	102	110	98	105	95	114	101	108	98	103	95	103	96	99	94	96	93	90	89			
2.50	120	103	114	100	109	98	116	102	111	100	106	97	106	98	102	96	99	95	93	91			
3.00	122	105	117	102	112	100	118	104	114	101	109	99	108	99	105	98	101	96	94	93			
4.00	125	107	121	105	117	103	121	105	117	104	114	102	111	102	109	100	104	99	97	96			
5.00	127	108	124	106	121	105	123	107	120	105	117	104	113	103	111	102	106	101	99	98			
10.00	132	110	130	110	129	110	127	109	126	109	125	109	118	107	118	107	111	105	104	102			

