


# 東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF13N-GX53
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

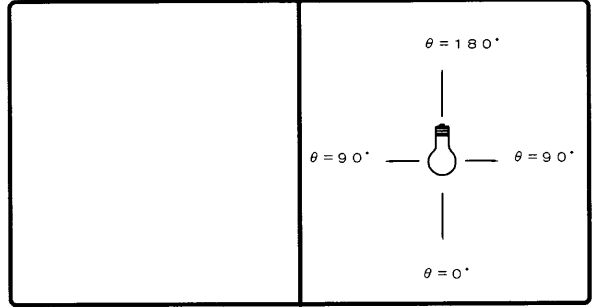

効率	器具光束		770 lm
	F	器具光束	100 %
	器具光束	器具光束	770 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考  
データは初期の標準値です。

θ	φ A-A
0°	337
10°	331
20°	312
30°	278
40°	233
50°	184
60°	134
70°	88
80°	46
90°	20
100°	15
110°	13
120°	11
130°	10
140°	8
150°	0
160°	0
170°	0
180°	0

反射率 (%)	天井		80						70						50						30		20		0	
	壁	床	70		50		30		70		50		30		50		30		30		10		0			
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
室指数		照明率 (×0.01)																								
0.60	60	55	45	43	36	35	57	53	44	42	36	35	42	40	34	34	33	33	28	26						
0.80	70	64	56	52	46	44	68	62	54	51	45	44	52	49	44	43	42	41	37	34						
1.00	80	71	65	60	55	53	76	69	63	59	54	52	60	57	52	50	50	49	44	41						
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	60	57	57	55	50	48						
1.50	93	82	80	72	70	65	89	79	77	71	69	64	73	68	66	62	63	61	56	53						
2.00	101	88	89	80	81	74	96	85	86	78	78	72	81	75	74	70	71	68	63	61						
2.50	106	91	96	84	87	79	101	89	92	83	85	78	86	80	80	75	76	73	69	66						
3.00	109	94	100	88	93	83	104	91	97	86	90	81	90	83	85	79	80	76	72	69						
4.00	114	97	106	92	100	88	109	95	102	90	97	87	95	87	91	84	85	81	77	74						
5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	94	87	88	84	81	78						
10.00	123	103	119	101	116	98	117	101	114	99	111	97	105	95	103	94	96	90	88	85						

