


# 東芝照明器具配光データシート

名称	LED流元灯
形名	LEDB87002-LS

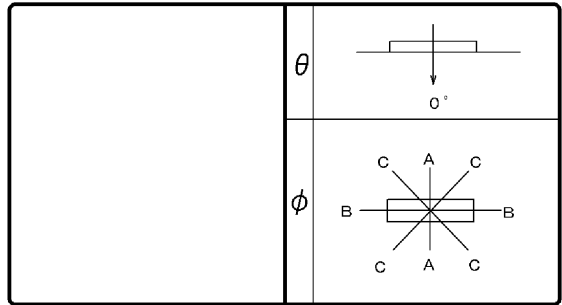

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	470 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	カバー (乳白)
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	360	360	360
10°	351	354	353
20°	329	331	331
30°	296	297	297
40°	254	255	254
50°	204	204	206
60°	149	150	150
70°	93	95	93
80°	38	42	39
90°	4	4	4
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	60	56	46	43	37	36	59	54	45	43	36	35	43	42	36	35	35	34	30	28
0.80	72	65	57	53	47	45	69	63	56	53	47	45	54	51	46	44	45	44	39	37
1.00	81	73	67	62	57	54	78	71	65	61	56	53	63	59	55	53	53	52	47	45
1.25	89	79	75	69	65	61	86	77	73	68	64	61	70	66	62	60	60	59	54	52
1.50	94	83	82	74	72	67	91	81	80	73	71	66	76	71	69	65	66	64	60	57
2.00	103	89	91	82	83	76	99	88	89	81	81	75	84	78	78	73	75	72	68	66
2.50	108	93	98	86	90	81	104	91	95	85	88	80	90	83	84	79	81	77	73	71
3.00	111	95	103	90	95	85	107	94	99	89	93	84	94	86	89	83	85	81	77	75
4.00	116	99	109	94	103	90	112	97	105	93	100	89	99	91	95	88	90	86	83	81
5.00	119	100	113	97	108	94	114	99	109	96	104	93	102	93	99	91	94	89	86	84
10.00	125	104	121	102	118	101	120	103	117	101	114	100	109	99	107	97	101	95	93	91

