


# 東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF13L-WGX53
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

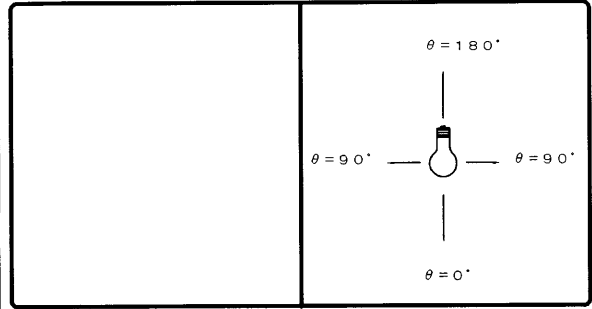

効率	F		%
	F		%
	F	100	%
	器具光束	700	lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)				
$\theta$	$\phi$	A-A	B-B	C-C
0°		1168		
10°		1160		
20°		715		
30°		196		
40°		118		
50°		90		
60°		76		
70°		71		
80°		39		
90°		14		
100°		9		
110°		9		
120°		11		
130°		10		
140°		7		
150°		1		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
室指数		照明率 (×0.01)																							
0.60	76	70	64	60	56	54	74	69	63	60	56	54	61	58	55	53	54	53	49	47					
0.80	85	77	73	68	65	62	83	76	71	67	64	62	69	66	62	61	61	60	56	54					
1.00	93	83	80	75	72	69	90	81	79	74	71	68	76	72	69	67	67	65	62	59					
1.25	98	87	86	79	78	73	95	85	84	78	77	73	81	76	74	71	72	70	66	64					
1.50	102	90	91	83	83	77	99	88	89	82	81	76	85	79	78	75	75	73	69	67					
2.00	109	94	99	88	91	83	105	93	96	87	89	82	91	84	85	80	81	78	74	72					
2.50	113	97	104	92	97	87	108	95	101	90	94	86	95	87	89	84	85	82	78	76					
3.00	116	99	108	95	101	90	111	97	104	93	98	89	98	90	93	87	88	85	81	79					
4.00	120	102	114	98	108	95	115	100	109	97	105	94	102	94	98	91	93	89	85	83					
5.00	123	104	117	101	113	98	118	102	113	99	109	97	105	96	102	94	96	91	88	86					
10.00	128	107	126	106	123	105	123	106	121	104	119	103	112	101	101	100	103	97	95	92					

