


東芝ランプ 配光データシート

名称	LED電球 一般電球形
形名	LDA6N/3
光束	420 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

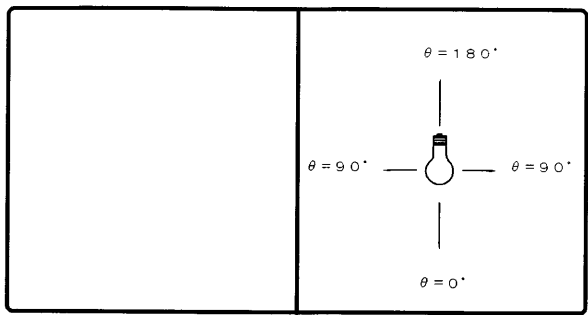

効率	%	
	F	100 %
	器具光束	420 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です。

光度 (cd/1000lm)	
θ	A-A
0°	248
10°	245
20°	238
30°	223
40°	201
50°	173
60°	140
70°	105
80°	74
90°	49
100°	32
110°	20
120°	13
130°	8
140°	5
150°	3
160°	1
170°	1
180°	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																							
0.60	56	52	41	39	32	31	54	50	40	38	31	30	37	36	30	29	28	28	23	20				
0.80	66	60	51	48	41	39	63	58	49	47	40	39	46	44	38	37	36	36	30	28				
1.00	75	68	60	56	50	47	72	65	58	54	49	46	54	51	46	44	44	43	37	34				
1.25	83	73	68	62	58	54	79	71	66	61	56	53	61	58	53	51	50	49	43	40				
1.50	89	78	75	68	64	60	84	75	72	66	62	59	67	62	59	56	55	54	48	45				
2.00	97	84	84	75	75	68	92	81	81	73	72	67	75	70	68	64	63	61	56	52				
2.50	102	88	91	80	82	74	97	85	87	78	79	72	80	74	74	69	69	66	61	57				
3.00	106	91	96	84	87	78	100	88	92	82	84	76	84	77	78	73	73	70	65	61				
4.00	111	94	102	88	95	83	105	91	98	86	91	82	90	82	84	78	78	75	70	66				
5.00	114	96	107	91	100	87	108	94	102	89	96	85	93	85	89	81	82	78	74	70				
10.00	121	101	116	98	112	95	115	98	111	96	107	93	101	91	98	89	90	85	82	78				

