


東芝ランプ 配光データシート

名称	LED電球 一般電球 形9. 4W
形名	LDA9N
光束	850 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

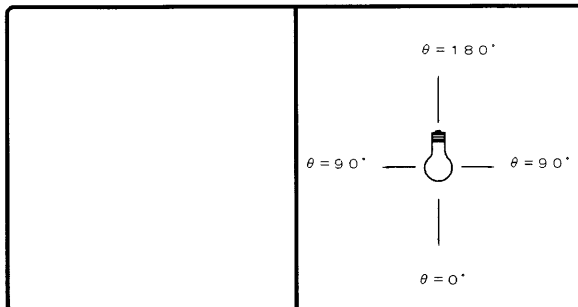

効率		
	F ○	100 %
器具光束		850 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考
データは初期の標準値です。

θ	φ	A-A	B-B
0°		240	
10°		241	
20°		241	
30°		232	
40°		211	
50°		179	
60°		139	
70°		102	
80°		72	
90°		49	
100°		33	
110°		22	
120°		15	
130°		9	
140°		3	
150°		1	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	10	10	0			
室指数	照明率 (×0.01)																			
0.60	57	52	42	40	32	31	54	50	40	38	32	31	38	36	30	29	29	28	23	21
0.80	68	61	52	49	42	40	65	59	50	47	41	39	47	45	39	38	37	36	31	28
1.00	77	69	61	57	51	48	73	66	59	55	50	47	55	52	47	45	45	43	38	35
1.25	84	75	69	64	59	55	80	72	67	62	57	54	62	59	54	52	51	50	44	41
1.50	90	79	76	69	66	61	86	77	73	67	64	60	68	64	60	57	57	55	49	46
2.00	98	86	86	77	76	70	94	83	83	75	74	68	76	71	69	65	65	62	57	54
2.50	104	89	92	82	83	75	98	87	89	80	80	73	82	75	75	70	70	67	62	59
3.00	107	92	97	85	89	79	102	89	93	83	86	78	86	79	80	74	74	71	66	62
4.00	112	95	104	90	97	85	107	93	99	88	93	83	91	83	86	79	80	76	71	68
5.00	115	98	108	93	102	89	110	95	103	91	98	87	95	86	90	83	83	79	75	71
10.00	122	102	118	99	114	97	116	100	112	97	109	95	102	93	100	90	92	86	83	79

