


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-23553C (K)

保守率	良	0.50
	中	0.47
	否	0.44


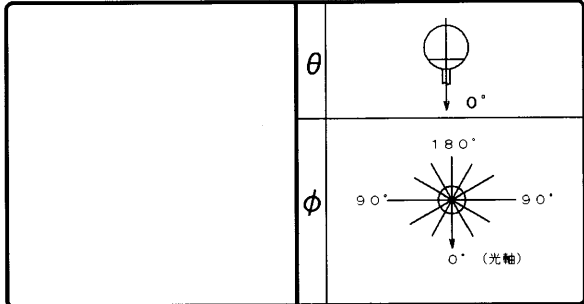


光源	名称	HL-ネオハライド2
	形名	MF250L-J2/B D-PS
	光束	22000 lm x 1

効 率	F $\frac{1}{2}$	8.1 %
	F $\frac{1}{4}$	44.8 %
	F \bigcirc	52.9 %
	器具 光束	11636 lm

備考

前面	グローブ (透明)
反射面	塗装 (白)

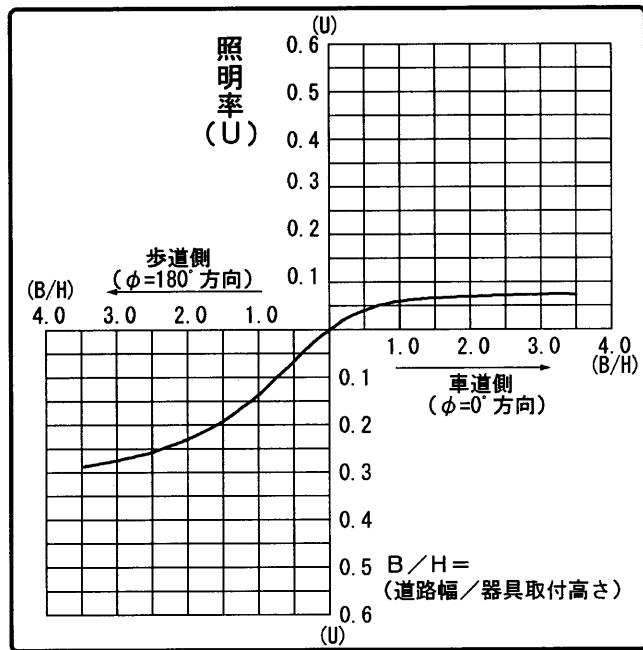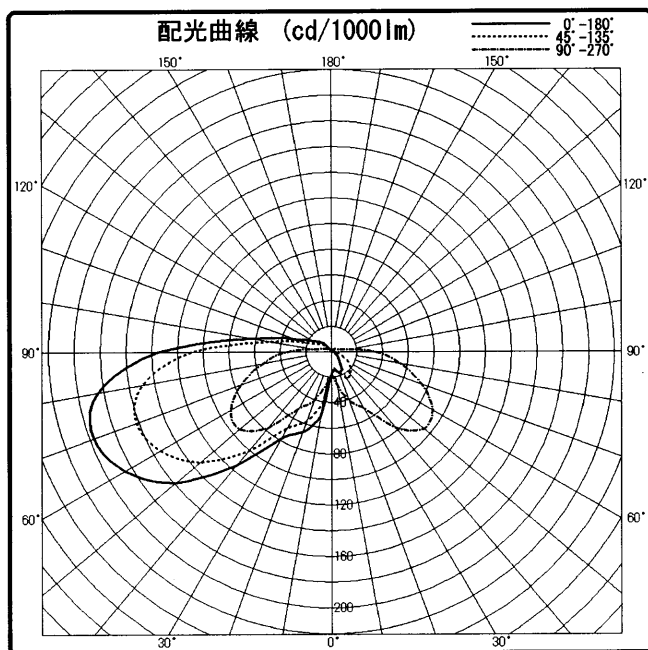

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	17	17	17	17	17
10°	14	13	27	41	51
20°	18	23	41	58	67
30°	16	25	51	69	78
40°	10	23	78	101	116
50°	6	20	94	134	159
60°	4	15	91	154	186
70°	3	9	75	162	197
80°	3	5	55	150	185
90°	3	3	34	109	135
100°	3	2	14	47	61
110°	2	1	7	21	29
120°	2	1	5	14	17
130°	2	0	4	10	13
140°	2	0	2	6	9
150°	1	0	0	0	2
160°	1	0	0	0	2
170°	1	0	0	0	2
180°	1	1	1	1	1

