


東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF5N-GX53
光束	320 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

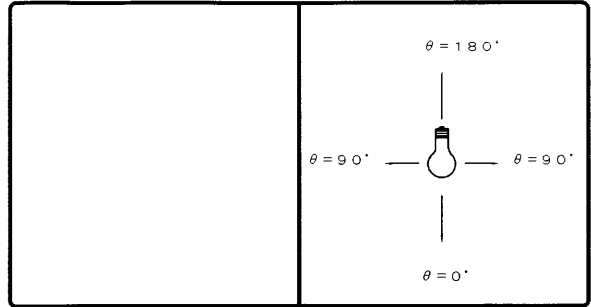

効率	F		%
	F		%
	F	100	%
	器具光束	320	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	φ	A-A	B-B
0°		315	
10°		309	
20°		291	
30°		260	
40°		218	
50°		172	
60°		126	
70°		82	
80°		43	
90°		18	
100°		14	
110°		12	
120°		11	
130°		9	
140°		7	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	30	10	0	30	10	10	0	10	0	
室指数		照明率 (×0.01)																		
0.60	56	51	42	40	34	33	54	50	41	39	33	32	39	38	32	31	31	31	26	24
0.80	66	60	52	49	43	41	63	58	51	48	42	41	48	46	41	40	40	39	34	32
1.00	74	67	61	56	52	49	71	65	59	55	51	48	56	53	49	47	47	46	41	39
1.25	81	72	68	63	59	56	78	70	66	61	58	55	63	59	56	53	53	52	47	45
1.50	87	76	75	68	66	61	83	74	72	66	64	60	68	64	61	58	58	57	52	49
2.00	94	82	83	75	75	69	90	80	81	73	73	68	76	70	69	66	66	64	59	57
2.50	99	85	89	79	82	74	94	83	86	77	79	72	80	74	75	70	71	68	64	61
3.00	102	87	94	82	87	77	98	85	90	80	84	76	84	77	79	74	75	71	68	65
4.00	106	90	99	86	94	82	102	88	96	84	90	81	89	81	85	78	79	76	72	69
5.00	109	92	103	89	98	85	104	90	99	87	95	84	92	84	88	81	83	78	75	72
10.00	115	96	111	94	108	92	110	94	107	92	104	90	98	89	96	87	89	85	82	79

