


東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF5N-WGX53
光束	320 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

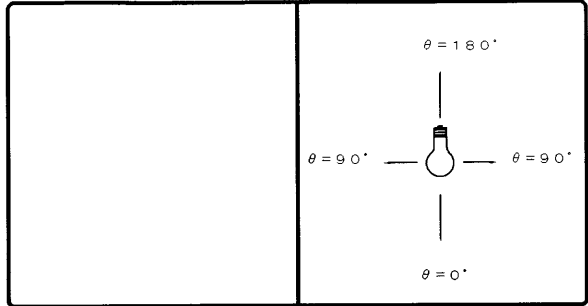

効率	F		%
	F		%
	F	100	%
	器具光束	320	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)					
θ	φ	A-A	B-B	C-C	D-D
0°		1660			
10°		1332			
20°		644			
30°		209			
40°		147			
50°		106			
60°		65			
70°		41			
80°		24			
90°		12			
100°		11			
110°		12			
120°		12			
130°		9			
140°		6			
150°		0			
160°		0			
170°		0			
180°		0			

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30			30	10			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照明率 (×0.01)																			
0.60		78	72	66	63	59	57	76	71	65	62	59	57	63	61	57	56	56	55	52	50
0.80		88	79	76	71	68	65	85	78	74	70	67	65	72	68	66	64	64	63	59	57
1.00		95	85	84	77	76	72	92	84	82	76	75	71	79	75	73	70	71	69	65	63
1.25		101	89	90	82	82	77	97	88	87	81	80	76	84	79	78	74	75	73	69	67
1.50		105	92	94	86	87	80	101	91	92	84	85	80	88	82	82	78	79	76	73	70
2.00		111	96	102	91	94	86	107	95	99	89	92	85	93	87	88	83	84	81	78	75
2.50		115	99	106	94	100	90	110	97	103	93	97	89	97	90	92	87	88	84	81	79
3.00		118	101	110	97	104	93	113	99	107	95	101	92	100	92	96	89	91	87	84	81
4.00		122	103	116	100	110	97	117	101	112	98	107	96	104	95	101	93	95	91	88	85
5.00		124	105	119	102	115	100	119	103	115	101	111	98	107	98	104	96	98	93	90	88
10.00		129	108	127	107	125	106	124	106	122	105	120	104	113	102	112	101	104	98	96	94

