


東芝ランプ 配光データシート

名称	LED電球 ミゼット レフ形
形名	LDR6L-W
光束	275 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

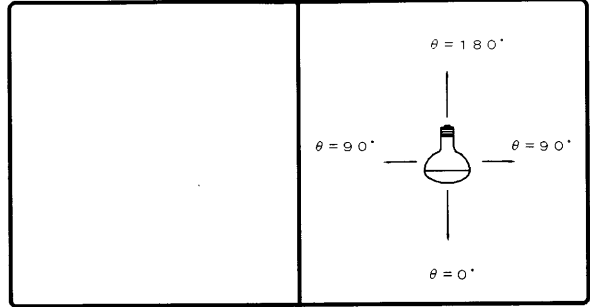

効率		96%
		96%
	F ○	100%
器具光束	275 lm	

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
0°	728	25°	430
		30°	364
		35°	289
		40°	234
		45°	194
5°	711	50°	161
		55°	136
		60°	114
		65°	93
		70°	73
10°	661	75°	54
		80°	36
		85°	19
		90°	10
15°	588		
20°	504		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																					
0.60	71	66	57	54	48	47	69	64	56	54	48	47	54	52	47	46	46	45	41	39		
0.80	82	75	68	64	59	57	80	73	67	63	58	56	65	62	57	55	56	55	50	48		
1.00	92	82	78	72	68	65	89	81	76	71	68	65	74	70	66	64	64	63	58	56		
1.25	99	88	86	79	76	72	96	86	84	78	75	71	81	76	73	70	71	69	65	63		
1.50	104	92	92	84	83	77	101	90	90	83	82	76	86	81	79	75	77	74	70	68		
2.00	112	98	101	91	93	85	108	96	99	89	91	84	94	87	88	83	84	81	77	75		
2.50	117	101	107	95	100	90	113	99	104	94	97	89	99	91	93	87	89	86	82	80		
3.00	120	103	112	98	105	93	116	102	109	97	102	92	103	94	97	91	93	89	86	84		
4.00	125	106	118	102	112	98	120	104	114	101	109	97	107	98	103	95	98	94	91	88		
5.00	128	108	122	104	116	101	123	106	118	103	113	100	111	101	107	98	101	96	94	92		
10.00	133	112	130	110	127	108	128	110	126	108	123	107	117	106	115	105	109	103	101	98		

