


東芝ランプ 配光データシート

名称	LED電球 ミゼット レフ形
形名	LDR6N-W
光束	425 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

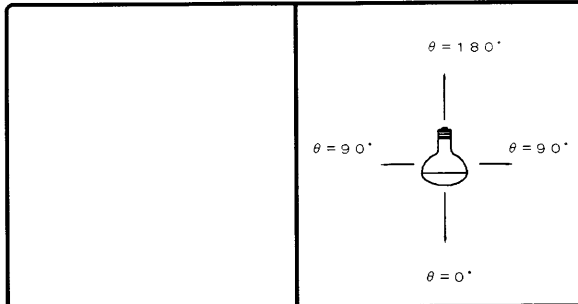

効率		100 %
	器具光束	425 lm

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考
データは初期の標準値です。

光度 (cd/1000lm)	
0°	730
5°	714
10°	664
15°	591
20°	506
25°	430
30°	365
35°	290
40°	235
45°	195
50°	162
55°	137
60°	114
65°	93
70°	73
75°	54
80°	36
85°	19
90°	10

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	10	10	0			
室指数		照明率 (×0.01)																		
0.60	72	66	57	54	48	47	70	65	56	54	48	47	55	53	47	46	47	46	41	40
0.80	83	75	68	64	59	57	80	74	67	63	59	56	65	62	57	56	56	55	51	49
1.00	92	83	78	73	69	65	89	81	77	72	68	65	74	70	66	64	65	63	58	56
1.25	99	88	86	79	77	72	96	87	84	78	76	71	81	76	73	70	71	69	65	63
1.50	105	92	92	84	83	77	101	91	90	83	82	77	86	81	79	76	77	74	70	68
2.00	112	98	102	91	93	85	109	96	99	90	91	84	94	88	88	83	85	81	78	75
2.50	117	101	108	95	100	90	113	99	105	94	98	89	99	92	93	88	90	86	82	80
3.00	121	103	112	98	105	94	116	102	109	97	102	93	103	95	98	91	93	89	86	84
4.00	125	106	118	102	112	99	121	105	115	101	109	98	108	99	104	96	99	94	91	89
5.00	128	108	122	105	117	102	123	107	118	104	114	101	111	101	107	99	102	97	94	92
10.00	134	112	131	110	128	108	129	110	126	109	123	107	118	106	116	105	109	103	101	99

