


# 東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF6L-WGX53
光束	350 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

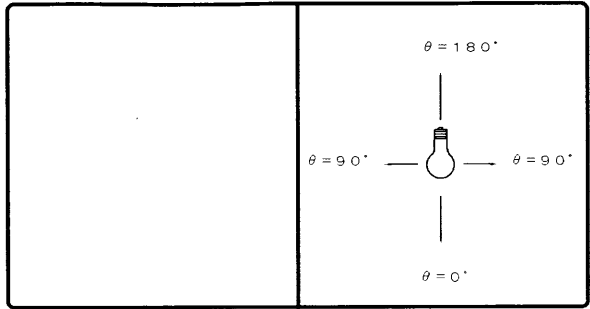

効率	F	%
	F	%
	F	100 %
	器具光束	350 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1828		
10°	1348		
20°	717		
30°	263		
40°	157		
50°	97		
60°	54		
70°	26		
80°	17		
90°	3		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
室指数	照明率 (×0.01)																								
0.60	80	73	68	65	62	60	78	72	68	65	61	60	66	64	61	59	60	59	56	54					
0.80	89	81	78	73	71	68	87	80	77	72	70	67	75	71	69	67	68	66	63	62					
1.00	96	86	86	79	78	74	94	85	84	79	77	74	82	77	76	73	74	73	69	68					
1.25	101	90	91	84	84	79	99	89	90	83	83	78	87	82	81	78	79	77	74	72					
1.50	105	93	96	87	89	82	102	92	94	86	87	82	90	85	85	81	83	80	77	75					
2.00	111	97	103	92	96	88	108	95	100	91	94	87	96	89	91	86	88	85	82	80					
2.50	115	99	107	95	101	91	111	98	104	94	99	90	99	92	95	89	91	88	85	83					
3.00	117	100	111	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	88	86					
4.00	121	103	115	100	111	97	117	101	112	99	108	97	106	97	103	95	98	93	91	89					
5.00	123	104	119	102	115	100	119	103	115	101	112	99	108	99	106	97	100	96	94	92					
10.00	128	107	126	106	124	105	123	106	122	105	120	104	114	103	113	102	106	100	99	97					

