


東芝ランプ 配光データシート

名称	LEDユニットフラット形
形名	LDF6L-GX53
光束	350 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

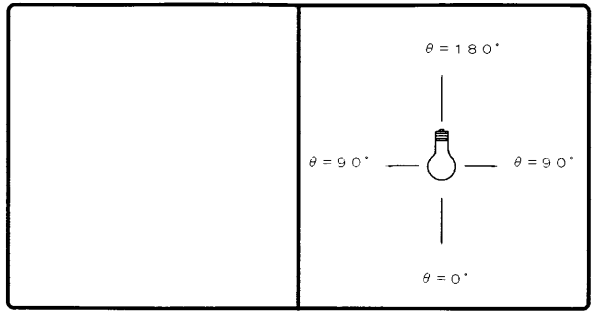

効率	F		%
	F		%
	F	100	%
	器具光束	350	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		368	
10°		360	
20°		337	
30°		298	
40°		247	
50°		191	
60°		135	
70°		83	
80°		37	
90°		10	
100°		9	
110°		8	
120°		7	
130°		6	
140°		5	
150°		1	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		30	10		10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照明率 (×0.01)																		
0.60	61	56	46	44	38	36	59	54	45	43	37	36	43	42	36	35	35	35	30	28
0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	46	44	45	43	39	37
1.00	81	73	67	62	57	54	78	71	65	61	56	54	62	59	54	53	53	51	47	44
1.25	88	78	75	69	65	61	85	77	73	68	64	61	69	65	62	59	60	58	53	51
1.50	94	83	82	74	72	67	90	81	79	73	71	66	75	70	68	65	65	63	59	56
2.00	102	89	91	81	83	75	98	87	88	80	81	74	83	77	77	73	73	71	67	64
2.50	107	92	97	86	89	81	103	90	94	84	87	80	88	82	83	77	79	76	72	69
3.00	110	95	102	89	95	84	106	93	98	88	92	83	92	85	87	81	83	79	75	73
4.00	115	98	108	93	102	90	110	96	104	92	99	88	97	89	93	86	88	84	80	78
5.00	118	100	112	96	107	93	113	98	108	94	103	91	100	92	97	89	91	87	84	81
10.00	124	103	120	101	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	88

