


東芝ランプ 配光データシート

名称	東芝電球形LEDランプ
形名	LDG9L
光束	530 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

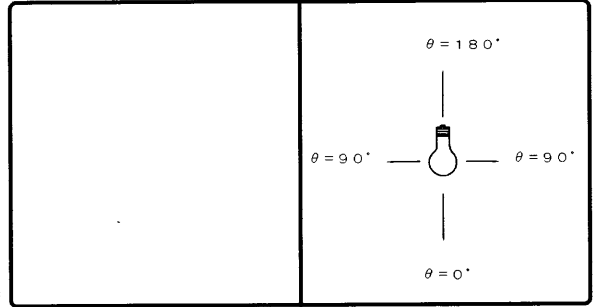

効率	F		%
	F		%
	F	100	%
	器具光束	530	lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考
データは初期の標準値です。

光度 (cd/1000lm)				
θ	ϕ	A-A	B-B	C-C
0°		181		
10°		179		
20°		174		
30°		165		
40°		153		
50°		138		
60°		122		
70°		105		
80°		88		
90°		73		
100°		58		
110°		46		
120°		35		
130°		26		
140°		18		
150°		11		
160°		6		
170°		2		
180°		0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		10		30		10		10		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	照明率 (×0.01)																																				
0.60	53	49	38	36	29	28	50	46	36	34	28	27	33	31	25	25	23	23	18	15																	
0.80	63	57	47	44	37	36	59	54	45	42	36	35	41	39	33	32	30	29	24	21																	
1.00	71	64	56	52	45	43	67	61	53	50	43	41	48	45	40	38	36	35	30	26																	
1.25	78	69	63	58	53	50	73	66	60	56	51	48	54	51	46	44	42	41	35	31																	
1.50	84	74	70	63	59	55	79	70	66	60	56	53	59	55	51	49	47	45	39	35																	
2.00	92	80	79	71	69	63	86	76	75	68	66	61	67	62	60	56	54	52	46	41																	
2.50	97	84	85	75	76	68	91	80	81	72	72	66	72	66	65	61	59	56	50	45																	
3.00	101	86	90	79	81	73	94	82	85	76	77	70	76	70	70	65	62	60	54	49																	
4.00	106	90	97	84	89	78	99	86	91	80	84	75	81	74	76	70	68	64	59	53																	
5.00	109	92	101	87	94	82	102	88	95	83	89	79	84	77	80	73	71	68	62	57																	
10.00	116	97	111	94	107	91	109	93	105	90	101	88	92	84	90	81	80	75	71	65																	

