


東芝ランプ 配光データシート

名称	東芝電球形LEDランプ
形名	LDA6L-E17/D
光束	340 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

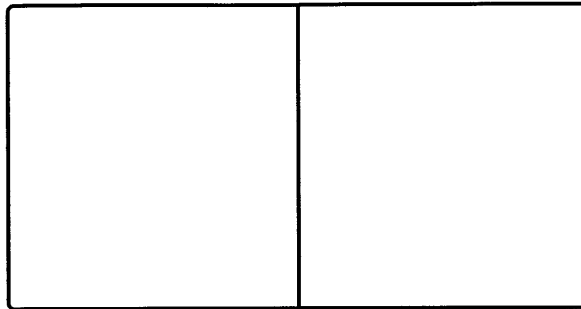

効率	F	%
	F	%
	F	100 %
	器具光束	340 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	298		
10°	300		
20°	294		
30°	271		
40°	237		
50°	195		
60°	148		
70°	106		
80°	72		
90°	46		
100°	29		
110°	18		
120°	11		
130°	7		
140°	1		
150°	1		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		10		0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照明率 (×0.01)																							
0.60	63	58	47	44	37	36	60	56	45	43	36	35	43	41	35	34	33	33	27	25				
0.80	74	68	58	54	47	45	71	65	56	53	46	45	53	51	44	43	43	42	36	33				
1.00	84	76	68	63	57	54	81	73	66	62	56	53	62	59	53	51	51	49	44	41				
1.25	92	82	77	70	66	62	88	79	74	69	64	61	70	66	61	58	58	56	51	47				
1.50	99	87	84	76	73	68	94	84	81	74	71	67	76	71	67	64	64	62	56	53				
2.00	108	94	94	84	84	77	103	91	91	82	82	75	85	79	77	73	73	70	65	61				
2.50	113	98	101	90	92	83	108	95	98	88	89	81	90	84	83	78	78	75	70	67				
3.00	117	100	107	93	98	87	112	98	102	91	95	86	95	87	88	82	83	79	74	71				
4.00	122	104	114	98	106	93	117	101	109	96	102	91	100	92	95	88	89	85	80	76				
5.00	126	106	118	101	112	97	120	104	113	99	107	95	104	95	100	91	93	88	84	80				
10.00	133	111	128	108	124	106	127	109	123	106	119	104	112	102	101	101	101	96	92	88				

