


東芝ランプ 配光データシート

名称	LED電球 一般電球形
形名	LDA8N-G
光束	580 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

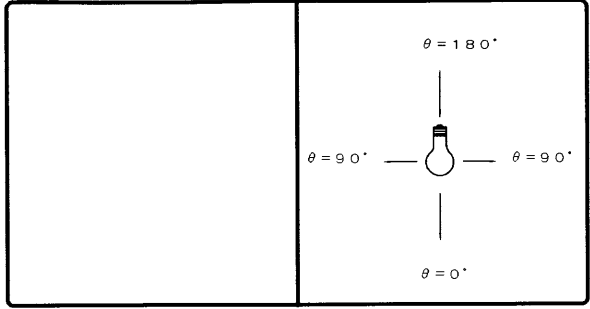

効率	F	%
	F	%
	F	100 %
	器具光束	580 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		118	
10°		118	
20°		118	
30°		118	
40°		118	
50°		116	
60°		112	
70°		108	
80°		102	
90°		95	
100°		86	
110°		77	
120°		67	
130°		56	
140°		17	
150°		1	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	照明率 (×0.01)																																				
0.60	52	48	37	35	27	26	48	45	34	33	26	25	30	29	23	22	20	19	14	11																	
0.80	62	56	46	43	36	34	57	52	43	40	33	32	37	35	29	29	26	25	19	15																	
1.00	70	63	54	50	43	41	65	59	51	47	41	39	44	42	36	34	31	30	24	19																	
1.25	77	69	62	57	50	47	71	64	57	53	47	45	50	47	42	40	36	35	29	23																	
1.50	83	73	68	62	57	53	77	68	63	58	53	50	55	51	47	44	41	39	32	27																	
2.00	91	79	78	69	67	61	84	74	72	65	63	58	62	58	55	52	47	45	39	32																	
2.50	97	83	84	74	74	67	89	78	78	70	69	63	67	62	60	56	52	50	43	36																	
3.00	100	86	89	78	80	71	93	81	83	74	74	67	71	65	65	60	56	53	46	39																	
4.00	106	90	96	83	88	77	97	85	89	79	82	73	76	70	71	65	61	58	51	44																	
5.00	109	92	101	86	93	81	101	87	93	82	87	77	80	73	75	69	64	61	55	47																	
10.00	117	98	112	94	107	91	108	92	103	89	99	86	89	80	85	77	73	69	63	55																	

