


東芝ランプ 配光データシート

名称	東芝電球型LEDランプ
形名	LDG10L
光束	730 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

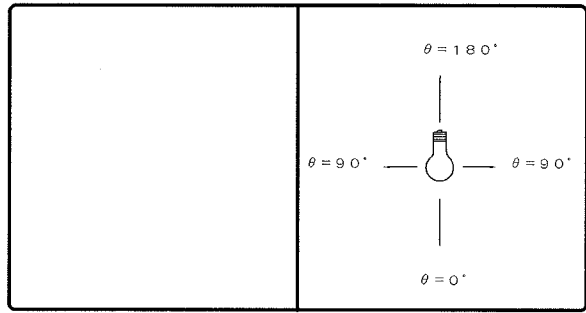

効率	F		%
	F		%
	F	100	%
	器具光束	730	lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考
データは初期の標準値です。

θ	ϕ		
	A-A	B-B	C-C
0°	181		
10°	179		
20°	174		
30°	165		
40°	154		
50°	140		
60°	124		
70°	107		
80°	90		
90°	74		
100°	59		
110°	46		
120°	35		
130°	26		
140°	15		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80						70						50						30						20						0					
	壁	床	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0			
			室指数	照 明 率 (×0.01)																																		
0.60	53	49	38	36	29	28	50	46	36	34	28	27	33	31	25	25	23	23	18	15																		
0.80	63	57	47	44	37	36	59	54	45	42	36	34	41	39	33	32	30	30	24	21																		
1.00	71	64	56	52	45	43	67	61	53	50	43	41	48	45	40	38	36	35	30	26																		
1.25	78	69	63	58	53	49	73	66	60	56	50	48	54	51	46	44	42	41	35	31																		
1.50	84	74	70	63	59	55	79	70	66	60	56	53	59	55	51	49	47	45	39	35																		
2.00	92	80	79	71	69	63	86	76	75	68	66	61	67	62	60	56	54	52	46	41																		
2.50	97	84	85	75	76	68	91	80	81	72	72	66	72	67	65	61	59	57	51	46																		
3.00	101	86	90	79	81	73	94	83	85	76	77	70	76	70	70	65	63	60	54	49																		
4.00	106	90	97	84	89	78	99	86	91	81	84	76	81	74	76	70	68	65	59	54																		
5.00	109	92	101	87	94	82	102	88	95	84	89	79	85	77	80	74	72	68	63	57																		
10.00	116	97	112	94	107	91	109	93	105	91	101	88	93	84	90	82	80	76	71	65																		

