


■ 東芝ランプ 配光データシート

名 称	東芝電球形LEDランプ
形 名	LDR5L-ME11/2
光 束	260 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

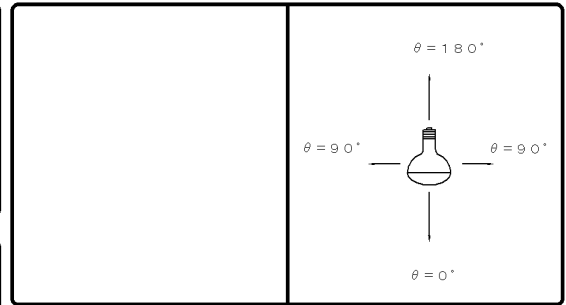

効 率	F	%
	F	%
	F	100 %
	器具 光束	260 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
0°	4532	25°	271
1°	4527	30°	205
2°	4407	35°	158
3°	4205	40°	123
4°	3937	45°	131
5°	3644	50°	46
6°	3331	55°	14
7°	3031	60°	9
8°	2737	65°	7
9°	2477	70°	3
10°	2235	75°	3
11°	2033	80°	3
12°	1847	85°	1
13°	1691	90°	0
14°	1539		
15°	1396		
16°	1239		
17°	1072		
18°	887		
19°	717		
20°	563		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	90	82	80	76	75	73	88	82	80	76	74	72	78	75	74	72	73	72	69	68			
0.80	97	88	88	83	83	79	95	87	87	82	82	79	85	82	81	78	80	78	76	75			
1.00	103	93	94	88	89	84	101	92	93	87	88	84	91	86	86	83	85	83	80	79			
1.25	107	95	99	90	93	87	104	94	97	90	92	86	94	89	89	86	88	85	83	82			
1.50	110	97	102	92	96	89	107	96	100	92	95	89	96	90	92	88	90	87	85	83			
2.00	114	99	107	95	101	92	111	98	104	95	99	92	100	93	96	91	93	90	87	86			
2.50	117	101	110	98	105	95	113	100	108	97	103	94	103	95	99	93	96	92	90	88			
3.00	119	102	113	99	109	97	115	101	110	98	106	96	105	97	102	95	98	94	92	90			
4.00	122	104	118	102	114	100	118	103	114	101	111	99	108	99	106	98	101	96	95	93			
5.00	124	105	121	104	118	102	120	104	117	103	114	101	111	101	109	100	103	98	97	95			
10.00	129	108	127	107	126	107	124	107	123	106	122	106	116	104	115	104	108	102	102	100			

