


# 東芝照明器具配光データシート

名称	LED高天井ダウンライト
形名	LEDD-10011W-DJ2

効 率	F	0 %
	F	100 %
	F	100 %
器具 光束		12000 lm

保 守 率	良	0.77
	中	0.77
	否	0.68

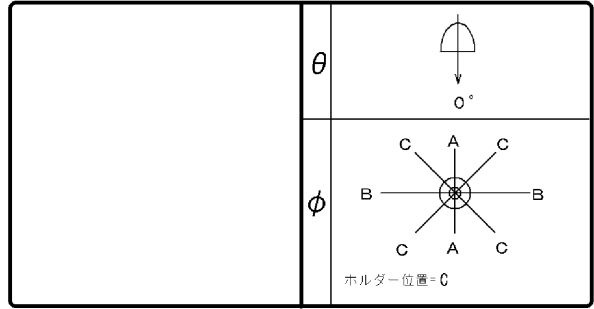

前面	カバー (透明)
反射面	アルミ蒸着処理

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

この器具は初期照度補正機能付器具です。光束・照度は記載値の約0.77倍になります。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	509		
10°	536		
20°	548		
30°	458		
40°	299		
50°	181		
60°	57		
70°	7		
80°	4		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	10	0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																							
0.60	70	65	57	54	50	48	69	64	57	54	49	48	55	53	49	47	48	47	43	42				
0.80	82	74	69	65	61	59	80	73	68	64	61	58	66	63	59	58	58	57	53	52				
1.00	91	82	79	73	71	67	89	80	78	73	70	67	75	71	69	66	67	66	62	60				
1.25	98	87	87	80	79	74	95	86	85	79	78	74	82	77	76	73	74	72	69	67				
1.50	103	91	93	84	85	79	100	89	91	83	84	79	87	82	82	78	79	77	74	72				
2.00	110	96	101	90	94	86	106	94	99	90	93	86	94	88	89	84	86	83	80	79				
2.50	114	98	106	94	100	90	110	97	104	93	98	90	99	91	94	88	91	87	84	82				
3.00	117	100	110	96	104	93	113	99	107	95	102	92	101	93	98	91	93	89	87	85				
4.00	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	93	90	89				
5.00	122	103	118	101	113	99	118	102	114	100	110	98	107	98	105	96	99	94	92	91				
10.00	126	106	124	104	121	103	122	104	120	103	117	102	112	101	110	100	104	98	97	95				

