


東芝照明器具配光データシート

名称	LED高天井ダウンライト
形名	LEDD-10013W-DJ2

効 率	F	0 %
	F	100 %
	F	100 %
器具 光束		12700 lm

保 守 率	良	0.77
	中	0.77
	否	0.68

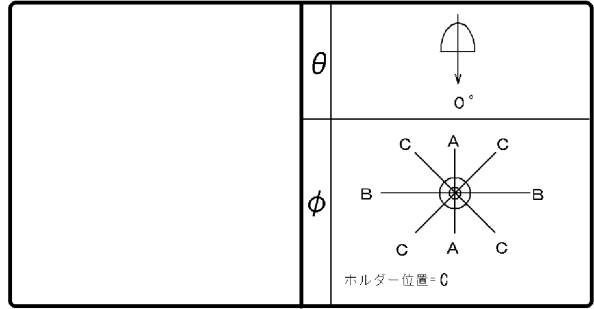

前面	カバー (透明)
反射面	アルミ蒸着処理

最大取付間隔	
A-A	1.00 H
B-B	1.00 H

備考

この器具は初期照度補正機能付器具です。光束・照度は記載値の約0.77倍になります。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	925		
10°	872		
20°	851		
30°	543		
40°	204		
50°	53		
60°	3		
70°	3		
80°	1		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																			
0.60	80	74	69	66	63	61	79	73	69	66	62	61	67	65	62	60	61	60	57	56
0.80	90	82	80	75	73	70	89	81	79	74	73	70	77	73	72	69	70	69	66	65
1.00	99	89	89	82	82	78	96	87	87	82	81	77	85	80	80	77	78	76	73	72
1.25	104	92	95	87	88	83	101	91	93	86	87	82	90	85	85	82	83	81	78	77
1.50	108	95	100	90	93	87	105	94	98	90	92	86	94	88	89	85	87	84	82	80
2.00	113	99	106	95	100	91	110	98	104	94	98	91	99	92	95	90	92	89	86	85
2.50	117	101	110	97	105	94	113	99	107	96	103	94	102	95	99	92	95	91	89	87
3.00	119	102	113	99	108	97	115	101	110	98	106	96	105	96	101	94	97	93	91	89
4.00	122	104	117	101	113	99	118	102	114	100	110	98	108	98	105	97	100	95	94	92
5.00	124	105	120	103	116	101	119	103	116	102	113	100	109	100	107	98	102	97	95	93
10.00	127	107	125	106	123	105	123	105	121	105	119	104	113	102	112	102	106	100	99	97

