


東芝ランプ 配光データシート

名称	防水LEDユニットフラット形
形名	LDF6L-GX53/W
光束	350 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

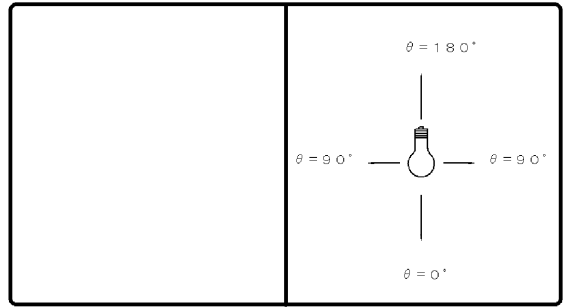

効率	F	%
	F	%
	F	100 %
	器具光束	350 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	374		
10°	368		
20°	349		
30°	313		
40°	260		
50°	197		
60°	136		
70°	81		
80°	34		
90°	6		
100°	5		
110°	4		
120°	3		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	照明率 (×0.01)																								
0.60	61	56	47	44	38	37	59	55	46	44	38	37	44	43	37	36	36	35	31	29					
0.80	72	66	58	54	49	47	70	64	57	54	48	46	55	52	47	45	46	45	40	38					
1.00	82	73	68	63	58	55	79	72	66	62	57	55	63	60	56	54	54	53	48	46					
1.25	89	79	76	70	66	62	86	77	74	69	65	62	71	67	63	61	61	60	55	53					
1.50	95	84	82	75	73	68	92	82	80	74	72	67	77	72	69	66	67	65	60	58					
2.00	103	89	92	82	84	76	99	88	90	81	82	76	85	79	78	74	75	73	68	66					
2.50	108	93	98	87	90	82	104	91	95	86	88	81	90	83	84	79	81	77	74	71					
3.00	111	95	103	90	96	85	107	94	100	89	93	84	94	86	89	83	85	81	77	75					
4.00	116	98	109	94	103	90	111	97	105	93	100	89	99	90	95	87	90	86	82	80					
5.00	118	100	113	97	108	94	114	99	109	95	104	92	102	93	98	90	93	88	86	83					
10.00	124	104	121	102	118	100	119	102	117	101	114	99	109	98	107	97	100	95	92	90					

