


東芝ランプ 配光データシート

名称	防水LEDユニットフラット形
形名	LDF6L-WGX53 /W
光束	350 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

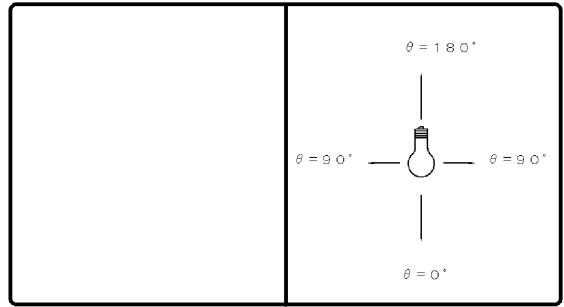

効率	F	%
	F	%
	F	100 %
	器具光束	350 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

データは初期の標準値です。

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		1246	
10°		1014	
20°		714	
30°		380	
40°		147	
50°		106	
60°		63	
70°		32	
80°		14	
90°		3	
100°		3	
110°		2	
120°		2	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30						
室指数	照明率 (×0.01)																																				
0.60	77	71	65	62	58	56	75	70	64	61	58	56	63	60	57	56	56	55	52	50																	
0.80	87	79	75	71	68	65	85	78	74	70	67	65	72	69	66	64	65	63	60	58																	
1.00	95	85	84	78	76	72	92	84	82	77	75	72	80	75	74	71	72	70	67	65																	
1.25	100	89	90	82	82	77	98	88	88	82	81	77	85	80	79	76	77	75	72	70																	
1.50	105	92	95	86	88	81	102	91	93	85	86	81	89	84	84	80	81	79	75	74																	
2.00	111	96	102	91	95	87	107	95	100	90	93	86	95	88	90	85	87	84	81	79																	
2.50	114	99	107	94	101	91	111	97	104	93	98	90	99	91	94	88	91	87	84	82																	
3.00	117	100	110	97	105	93	113	99	107	96	102	93	102	94	98	91	93	89	87	85																	
4.00	121	103	115	100	111	97	117	101	112	99	108	96	106	97	102	94	97	93	90	89																	
5.00	123	104	119	102	115	100	119	103	115	101	111	99	108	98	105	97	100	95	93	91																	
10.00	128	107	126	106	123	105	123	106	121	105	119	104	113	102	112	102	105	100	98	96																	

