


東芝ランプ 配光データシート

名称	LED電球
形名	LDT7L-G
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

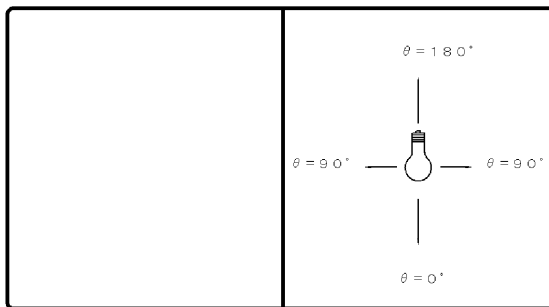

効率	F	%
	F	%
	F	100 %
	器具光束	485 lm

最大取付間隔	
A-A	2.2 H
B-B	2.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	58		
10°	63		
20°	73		
30°	83		
40°	90		
50°	97		
60°	100		
70°	100		
80°	96		
90°	92		
100°	88		
110°	83		
120°	76		
130°	63		
140°	48		
150°	35		
160°	18		
170°	3		
180°	0		

反射率 (%)	天井		80			70			50			30		20		0				
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	10	0				
室指数	照明率 (×0.01)																			
0.60	48	44	34	32	25	24	44	41	31	30	23	22	26	25	19	19	16	16	11	7
0.80	57	52	42	39	32	31	52	48	39	37	30	29	33	31	25	25	21	21	15	10
1.00	65	59	50	46	39	37	59	54	46	43	36	35	38	36	31	30	26	25	19	14
1.25	72	64	57	52	46	43	66	59	52	48	43	40	44	41	36	35	30	29	23	17
1.50	77	68	63	57	52	48	70	63	58	53	48	45	48	45	41	39	34	33	26	20
2.00	85	74	72	64	62	56	78	69	66	60	57	53	55	51	48	46	40	39	32	25
2.50	90	78	78	69	69	62	82	72	72	64	63	58	60	55	53	50	44	43	36	28
3.00	94	81	83	73	74	66	86	75	76	68	68	62	64	59	58	54	48	46	39	31
4.00	99	84	90	78	82	72	90	78	82	73	75	67	69	63	63	59	53	50	43	35
5.00	102	87	94	81	87	76	93	81	86	76	80	71	72	66	67	62	56	53	46	38
10.00	110	92	105	88	100	85	100	86	96	83	92	80	80	72	77	70	64	60	54	45

