


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF5L-GX53/2
光束	410 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

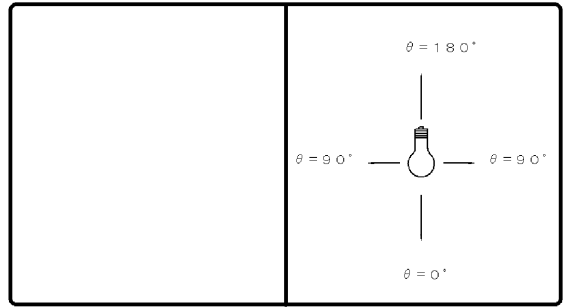

効率	F	%
	F	%
	F	100 %
	器具光束	410 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		358	
10°		350	
20°		327	
30°		288	
40°		240	
50°		187	
60°		135	
70°		87	
80°		44	
90°		18	
100°		14	
110°		13	
120°		11	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	50	30	30	50	30	30	50	30	30	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照明率 (×0.01)																					
0.60		60	56	46	44	37	36	58	54	45	43	36	35	43	41	35	35	34	34	29	27		
0.80		71	65	57	53	47	45	69	63	55	52	47	45	53	50	45	44	44	43	38	36		
1.00		81	72	66	61	56	54	78	70	65	60	55	53	61	58	54	52	52	50	45	43		
1.25		88	78	74	68	65	61	85	76	72	67	63	60	68	64	61	58	59	57	52	49		
1.50		94	82	81	73	71	66	90	80	79	72	70	65	74	69	67	64	64	62	57	55		
2.00		102	88	90	81	82	75	98	86	88	79	80	74	82	77	76	72	72	70	65	63		
2.50		107	92	97	85	89	80	102	90	93	84	86	79	88	81	82	77	78	74	70	68		
3.00		110	94	101	89	94	84	106	92	98	87	91	83	91	84	86	80	82	78	74	71		
4.00		115	98	108	93	101	89	110	96	104	91	98	88	97	88	92	85	87	83	79	76		
5.00		118	100	112	96	106	92	113	98	107	94	102	91	100	91	96	88	90	86	82	80		
10.00		124	103	120	101	117	99	118	102	115	100	113	98	107	96	105	95	97	92	90	87		

