


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF5L-WGX53 /2
光束	410 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

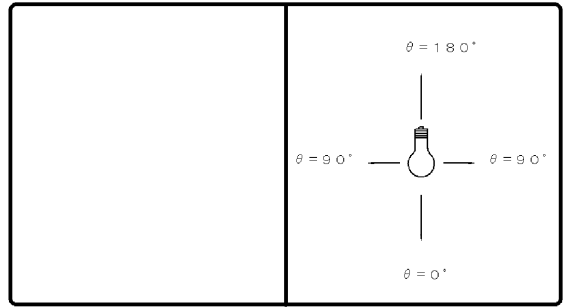

効率	F	%
	F	%
	F	100 %
	器具光束	410 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1038		
10°	885		
20°	586		
30°	343		
40°	190		
50°	108		
60°	71		
70°	49		
80°	32		
90°	11		
100°	8		
110°	5		
120°	3		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																							
0.60	73	67	60	57	53	51	71	66	59	57	52	51	58	55	51	50	50	49	46	44				
0.80	82	75	70	66	62	60	80	74	69	65	62	59	67	64	60	58	59	58	54	52				
1.00	91	81	79	73	70	67	88	80	77	72	70	66	74	70	68	65	66	64	61	59				
1.25	97	86	85	78	77	72	94	84	83	77	76	72	80	75	74	71	72	70	66	64				
1.50	101	89	91	82	83	77	98	88	88	81	81	76	85	79	78	75	76	73	70	68				
2.00	108	94	98	88	91	83	104	92	96	87	89	82	91	84	85	81	82	79	76	74				
2.50	112	96	103	91	96	87	108	95	100	90	94	86	95	88	90	84	86	83	79	77				
3.00	115	98	107	94	101	90	111	97	104	93	98	89	98	90	94	87	89	85	82	80				
4.00	119	101	112	97	107	94	114	99	109	96	104	93	102	93	99	91	93	89	86	84				
5.00	121	102	116	99	111	97	116	101	112	98	108	96	105	96	102	94	96	91	89	87				
10.00	126	106	123	104	121	103	121	104	119	103	117	101	111	100	109	99	102	97	95	92				

