


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF5N-GX53/ 2
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

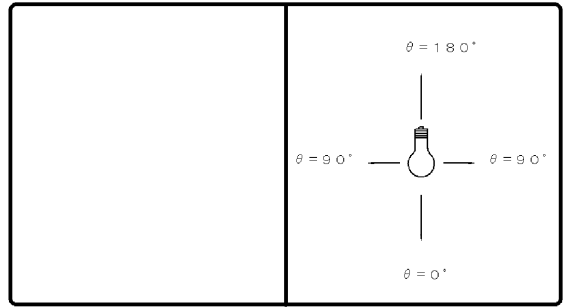

効率	F	%
	F	%
	F	100 %
	器具 光束	450 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考  
データは初期の標準値です。

$\theta$	A-A	B-B	C-C
0°	357		
10°	350		
20°	327		
30°	289		
40°	241		
50°	188		
60°	136		
70°	87		
80°	44		
90°	17		
100°	14		
110°	12		
120°	11		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80		70		50		30		20		0							
	壁	床	70	50	30	70	50	30	50	30	30	10	10	0						
室指数	照 明 率 (×0.01)																			
0.60	60	56	46	44	37	36	58	54	45	43	37	35	43	41	35	35	34	34	29	27
0.80	71	65	57	53	47	45	69	63	55	52	47	45	53	50	45	44	44	43	38	36
1.00	81	72	66	62	57	54	78	71	65	60	56	53	61	58	54	52	52	50	46	43
1.25	88	78	74	68	65	61	85	76	72	67	63	60	69	65	61	58	59	57	52	50
1.50	94	83	81	74	72	66	90	81	79	72	70	66	74	70	67	64	64	62	57	55
2.00	102	89	91	81	82	75	98	87	88	80	80	74	83	77	76	72	72	70	65	63
2.50	107	92	97	86	89	80	102	90	94	84	86	79	88	81	82	77	78	75	70	68
3.00	110	95	102	89	94	84	106	93	98	87	91	83	92	84	86	80	82	78	74	72
4.00	115	98	108	93	101	89	110	96	104	92	98	88	97	89	92	85	87	83	79	77
5.00	118	100	112	96	106	92	113	98	108	94	103	91	100	91	96	88	90	86	83	80
10.00	124	104	120	102	117	100	119	102	116	100	113	98	107	97	105	95	98	92	90	87

