


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF5N-WGX53 /2
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

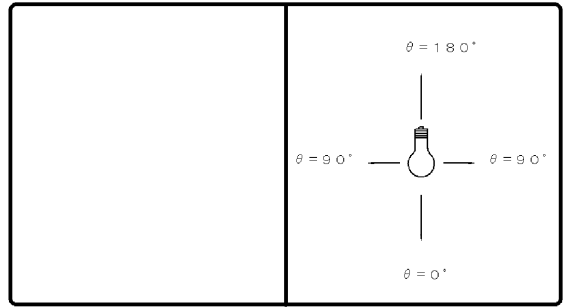

効率	F		%
	F		%
	F	100	%
	器具 光束	450	lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考
データは初期の標準値です。

光度 (cd/1000lm)		A-A	B-B	C-C
θ	ϕ	995		
0°		856		
10°		575		
20°		339		
30°		189		
40°		75		
50°		54		
60°		34		
70°		12		
80°		8		
90°		5		
100°		3		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数		照明率 (×0.01)																		
0.60	72	66	59	56	52	50	70	65	58	56	51	50	57	55	50	49	50	49	45	43
0.80	82	74	69	65	61	59	80	73	68	64	61	58	66	63	59	58	58	57	53	51
1.00	90	81	78	72	70	66	87	79	76	71	69	66	74	70	67	65	65	64	60	58
1.25	96	85	85	77	76	72	93	84	83	77	75	71	79	75	73	70	71	69	65	63
1.50	101	89	90	82	82	76	97	87	88	81	80	75	84	79	78	74	75	73	69	67
2.00	107	93	98	87	90	82	104	92	95	86	88	81	90	84	85	80	81	78	75	73
2.50	111	96	103	91	96	86	107	94	100	90	94	86	94	87	89	84	86	82	79	77
3.00	114	98	107	93	100	90	110	96	104	92	98	89	98	90	93	87	89	85	82	80
4.00	118	101	112	97	107	94	114	99	108	96	104	93	102	93	98	91	93	89	86	84
5.00	121	102	116	99	111	96	116	101	112	98	108	95	105	95	101	93	96	91	89	86
10.00	126	105	123	104	121	102	121	104	119	103	116	101	111	100	109	99	102	96	95	92

