


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF7N-WGX53 /2
光束	560 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

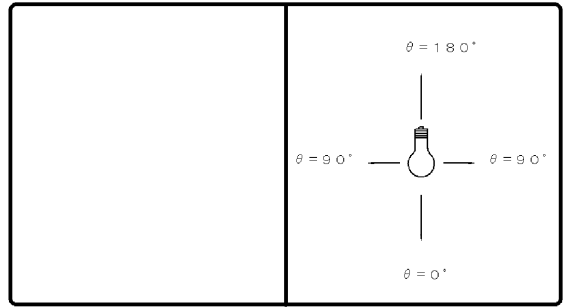

効率	F		%
	F		%
	F	100	%
	器具光束	560	lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1007		
10°	866		
20°	579		
30°	343		
40°	191		
50°	110		
60°	74		
70°	52		
80°	31		
90°	10		
100°	7		
110°	4		
120°	3		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		照明率 (×0.01)																						
0.60		72	66	60	57	52	50	70	65	59	56	52	50	57	55	51	50	50	49	45	44			
0.80		82	74	70	65	62	59	80	73	68	65	61	59	66	63	60	58	58	57	53	52			
1.00		90	81	78	72	70	66	88	79	77	72	69	66	74	70	67	65	66	64	60	58			
1.25		96	85	85	78	77	72	93	84	83	77	75	71	80	75	73	70	71	69	65	63			
1.50		101	89	90	82	82	76	98	87	88	81	81	76	84	79	78	74	76	73	69	67			
2.00		107	93	98	87	90	83	104	92	95	86	89	82	91	84	85	80	82	79	75	73			
2.50		111	96	103	91	96	87	107	94	100	90	94	86	95	88	90	84	86	82	79	77			
3.00		114	98	107	94	101	90	110	96	104	92	98	89	98	90	93	87	89	85	82	80			
4.00		118	100	112	97	107	94	114	99	109	96	104	93	102	93	98	91	93	89	86	84			
5.00		121	102	116	99	111	97	116	101	112	98	108	95	105	95	102	93	96	91	89	87			
10.00		126	105	123	104	121	102	121	104	119	102	116	101	111	100	99	102	97	95	92	92			

